

Energy Deposition in the NuMI Neutrino Beam-Line

F.Novoskoltsev

Institute for High Energy Physics, Protvino, Russia

1 Introduction

This Report gives results of energy deposition calculations for LE and ME configurations of the PH2 focusing system in different parts of the beam-line including the beam plug and hadronic hose. The presented information includes also results of calculations of energy distributions in front of the beam absorber.

All results were obtained using the MARS14 computer code for the 120 GeV resonant extracted primary beam with 4×10^{13} protons per spill. The total energy of a primary beam is equal to 768 kJ or 404 kW in terms of an average power taking into account the 1.9 s repetition period.

2 Description of the Beam-Line

The MARS model of the beam-line includes the focusing system located inside the target pile, the decay region and the beam absorber.

The focusing system includes the target, magnetic horns and the beam plug. The target is defined as a graphite plate with the rectangular cross section. Target lengths and average densities are equal to 0.94 m, 1.20 m and 1.66 g/cm^3 , 1.41 g/cm^3 for LE and ME beams respectively. The shapes of inner conductor of horns are described in report [1], the thicknesses of outer conductors are equal to 1" and (1/2)" for the first and second horn respectively. The graphite beam plug [2] has the length of 1.5 m and the diameter of 31.7 mm and is located 1 m downstream the horn1.

The target pile consists of steel and concrete shieldings surrounding the beam-line. The cross section of the target pile, which is shown in Figure 1 corresponds to the cross section from Figure 3-2-17 [3]. The point with coordinates of $(X,Y)=(0,0)$ corresponds to the beam-line axis.

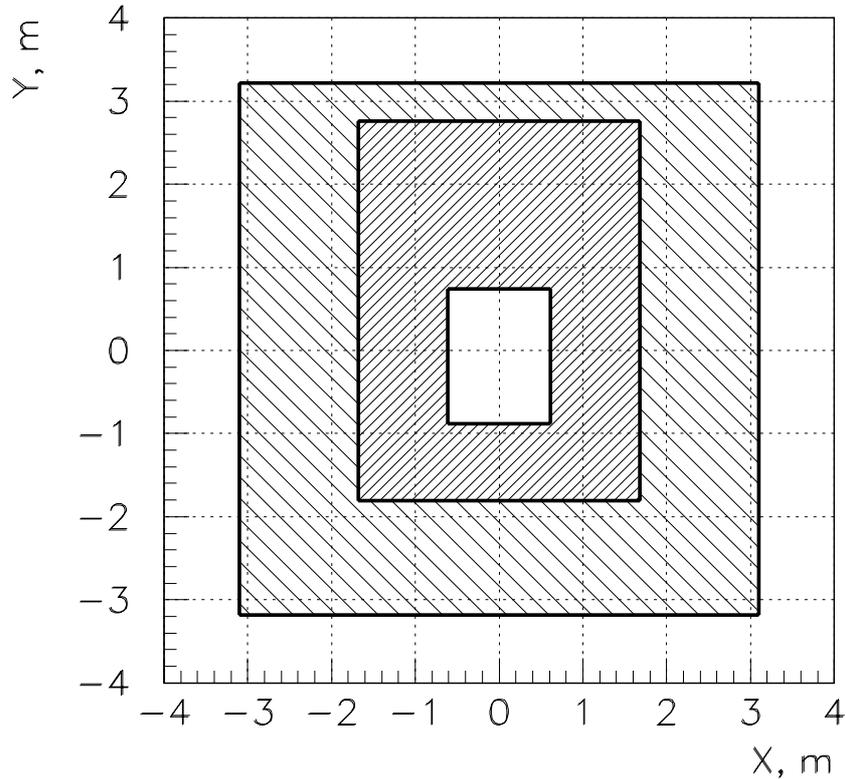


Figure 1: A cross section of the target pile.

The decay region consists of the steel pipe with the inner radius of 1 m and the thickness of $(1/2)''$, concrete shielding surrounding the steel pipe with the outer radius of 4.5 m and the hadronic hose [4] (the 1 mm radius aluminum wire with the current of 1 kA along the decay pipe axis).

The beam absorber [5] consists of the aluminum core with transverse dimensions of $1.32 \times 1.32 \text{ m}^2$ and the length of 2.4 m and steel shielding located around and behind the aluminum core. The total transverse dimensions of the absorber are equal to $3.96 \times 3.96 \text{ m}^2$ and its total length is equal to 3.72 m.

3 Energy Deposition

The main results were obtained for the regular operation mode, when a properly steered primary proton beam interacts with the production target. Besides of the regular operation mode, the incidental operation mode (the emergency), when a primary proton beam does not interact with the target was considered too.

3.1 Regular Operation Mode

Four different configurations of the LE beam-line were considered: OC – the original configuration, HH – the original configuration with the addition of the hadronic hose, BP – the original configuration with the addition of the beam plug, BP HH – the original configuration with the addition of the beam plug and the hadronic hose. Only OC and HH configurations were considered for the ME beam-line.

An average power deposited in different parts of the beam-line is given in Table 1. Energy deposition calculations were made with the minimal cutoff energy equal to 1 MeV. The main part of a leakage energy (more than 90%) is the energy carried away by muons and neutrinos.

| The Part of the Beam-line | LE-beam | | | | ME-beam | |
|---------------------------|---------|-------|-------|-------|---------|-------|
| | OC | HH | BP | BP HH | OC | HH |
| Focusing System | 15.7 | | 23.7 | | 17.3 | |
| target | 2.03 | | 2.02 | | 1.78 | |
| horn1 inner conductor | 1.80 | | 1.79 | | 1.31 | |
| horn1 outer conductor | 9.41 | | 9.29 | | 12.5 | |
| horn2 inner conductor | 0.21 | | 0.31 | | 0.11 | |
| horn2 outer conductor | 2.20 | | 3.82 | | 1.63 | |
| beam plug | — | | 6.51 | | — | |
| Target Pile | 128.9 | | 194.6 | | 140.8 | |
| Decay Region | 150.5 | 181.8 | 137.7 | 129.3 | 132.1 | 155.1 |
| steel pipe | 77.7 | 89.1 | 72.0 | 65.7 | 67.5 | 75.7 |
| concrete shielding | 72.8 | 92.4 | 65.7 | 63.6 | 64.6 | 79.1 |
| hadronic hose wire | — | 0.33 | — | 0.04 | — | 0.30 |
| Beam Absorber | 59.7 | 27.3 | 4.99 | 10.1 | 60.0 | 35.1 |
| aluminum core | 41.4 | 16.6 | 2.34 | 6.61 | 40.2 | 22.4 |
| steel shielding | 18.3 | 10.7 | 2.65 | 3.45 | 19.8 | 12.7 |
| Total | 354.8 | 353.7 | 361.0 | 357.7 | 350.2 | 348.3 |
| Leakage Power | 11.7 | 15.4 | 11.7 | 14.4 | 14.1 | 19.0 |

Table 1: An average power (kW) deposited in different parts of the beam-line in case of the regular operation mode.

Longitudinal distributions of an average power deposited in the target pile, the steel pipe of the decay region and in the hadronic hose wire for different configurations of the beam-line are shown in Figures 2–4. One should note, that:

- The most of an average power deposited in the target pile (more than 99.9%) is the power deposited in the steel shielding.
- Longitudinal distributions of an average power deposited in the steel pipe of the decay region are essentially different for LE and ME original configurations, as well as for ME OC and ME HH ones (contrary to plots given in Figures 15 and 17 of [6]).
- Longitudinal distributions of an average power deposited in concrete shielding of the decay region are similar to those in the steel pipe for all considered configurations. Moreover, the ratio of total powers deposited in different layers of concrete shielding with radii of $0 < R < 30$ cm, $30 \text{ cm} < R < 60$ cm and $R > 60$ cm (zero corresponds to the inner radius of concrete shielding) is $\sim 16 : 2 : 1$.
- The energy deposition density in a wire material of the hadronic hose reaches the value of $\sim 3 \text{ J/cm}^3$ for LE HH and ME HH configurations.

3.2 Emergency

Three different emergency situations were considered for beam-line with the hadronic hose. These situations differ by characteristics of a primary proton beam at the target position (see Table 2).

| Situation | X, mm | X', mrad | Y, mm | Y', mrad |
|-----------|-------|----------|-------|----------|
| E1 HH | 5 | 0 | 0 | 0 |
| E2 HH | 5 | 0.55 | 0 | 0 |
| E3 HH | 5 | 0.39 | 0 | 0.39 |

Table 2: Coordinates of a primary proton beam axis at the target position for considered emergency situations.

The results presented in this section correspond to both LE and ME configurations of the PH2 focusing system because in all cases the primary protons pass through field free holes in horn necks.

One should note, that in the absence of the hadronic hose the axis of a proton beam is located in front of the absorber at $R \simeq 40$ cm for both E2 and E3 situations. Contrary to E1 and E2 situations, in case of the E3 one the axis of a proton beam does not cross the hadronic hose wire. This leads to essential redistribution of a power deposition in the decay region and in the beam absorber (see Table 3).

| The Part of the Beam-line | The Emergency Situation | | |
|------------------------------|-------------------------|-------|-------|
| | E1 HH | E2 HH | E3 HH |
| Decay Region | 327.0 | 310.5 | 146.0 |
| steel pipe | 147.1 | 139.8 | 65.8 |
| concrete shielding | 178.0 | 168.9 | 79.4 |
| hadronic hose wire | 1.88 | 1.78 | 0.80 |
| Beam Absorber | 12.0 | 28.0 | 194.9 |
| aluminum core | 6.69 | 17.0 | 160.6 |
| steel shielding | 5.35 | 10.9 | 34.3 |
| Total | 339.0 | 338.5 | 340.9 |
| Leakage Power | 12.2 | 11.6 | 8.89 |

Table 3: An average power (kW) deposited in different parts of the beam-line for considered emergency situations.

Longitudinal distributions of an average power deposited in the steel pipe of the decay region and in the hadronic hose wire for considered emergency situations are shown in Figure 5.

As it follows from these plots the energy deposition density in a wire material of the hadronic hose reaches the values of ~ 89 , 23 and 6.5 J/cm³ for E1, E2 and E3 situations respectively.

4 Energy Distributions in Front of the Absorber

Beam energy distributions were obtained for the regular operation mode.

The beam parameters in front of the absorber for all considered configurations of the beam-line are given in Table 4. Radial distributions of the beam energy density and energy spectra of neutrino parents in front of the absorber are shown in Figures 6 and 7 respectively.

As it follows from the Table 4 for the original configurations of the beam-line the main part of an energy is brought to the absorber by non-interacting primary protons, including primary protons passing the target in tails of their x and y distributions. For other configurations of the beam-line the secondaries bring the main part of an energy. The share of π^\pm, K^\pm -mesons is equal to approximately 13 and 24% of an energy of secondaries for all LE and ME configurations respectively.

| Beam Particles | LE-beam | | | | ME-beam | |
|-----------------------------|---------|------|------|-------|---------|------|
| | OC | HH | BP | BP HH | OC | HH |
| Primary protons | 114.2 | 27.7 | 4.03 | 2.36 | 104.2 | 29.3 |
| Secondaries | 16.4 | 35.7 | 7.63 | 22.2 | 32.3 | 58.6 |
| p | 4.64 | 9.71 | 1.60 | 2.77 | 8.70 | 16.9 |
| π^\pm, K^\pm | 2.22 | 4.66 | 0.87 | 2.94 | 7.56 | 14.6 |
| n | 3.29 | 2.96 | 0.38 | 0.52 | 2.88 | 3.53 |
| $\pi^0 \rightarrow 2\gamma$ | 1.11 | 1.20 | 0.45 | 0.45 | 1.41 | 1.29 |
| e^\pm | 1.44 | 4.41 | 1.01 | 4.26 | 2.01 | 3.65 |
| μ^\pm | 3.74 | 12.8 | 3.32 | 11.3 | 9.76 | 18.6 |
| Total | 130.6 | 63.4 | 11.7 | 24.6 | 136.5 | 87.9 |

Table 4: A kinetic energy (kJ) of the beam in front of the absorber in case of the regular operation mode.

5 Conclusions

One should note again, that all presented above results were obtained for the resonant extracted primary proton beam with $\sigma_{x'} \simeq 0.041$ mrad and $\sigma_{y'} \simeq 0.055$ mrad at the target.

Taking into account, that distributions of an energy deposition in different parts of the beam-line in case of the regular operation mode

- are determined mostly by the properties of a focusing system and
 - do not depend on the angular spreads of a primary beam at the target,
- one should expect, that in case of the single turn extraction of a primary beam somewhat changes in the energy deposition distributions may take place only in the emergency situation.

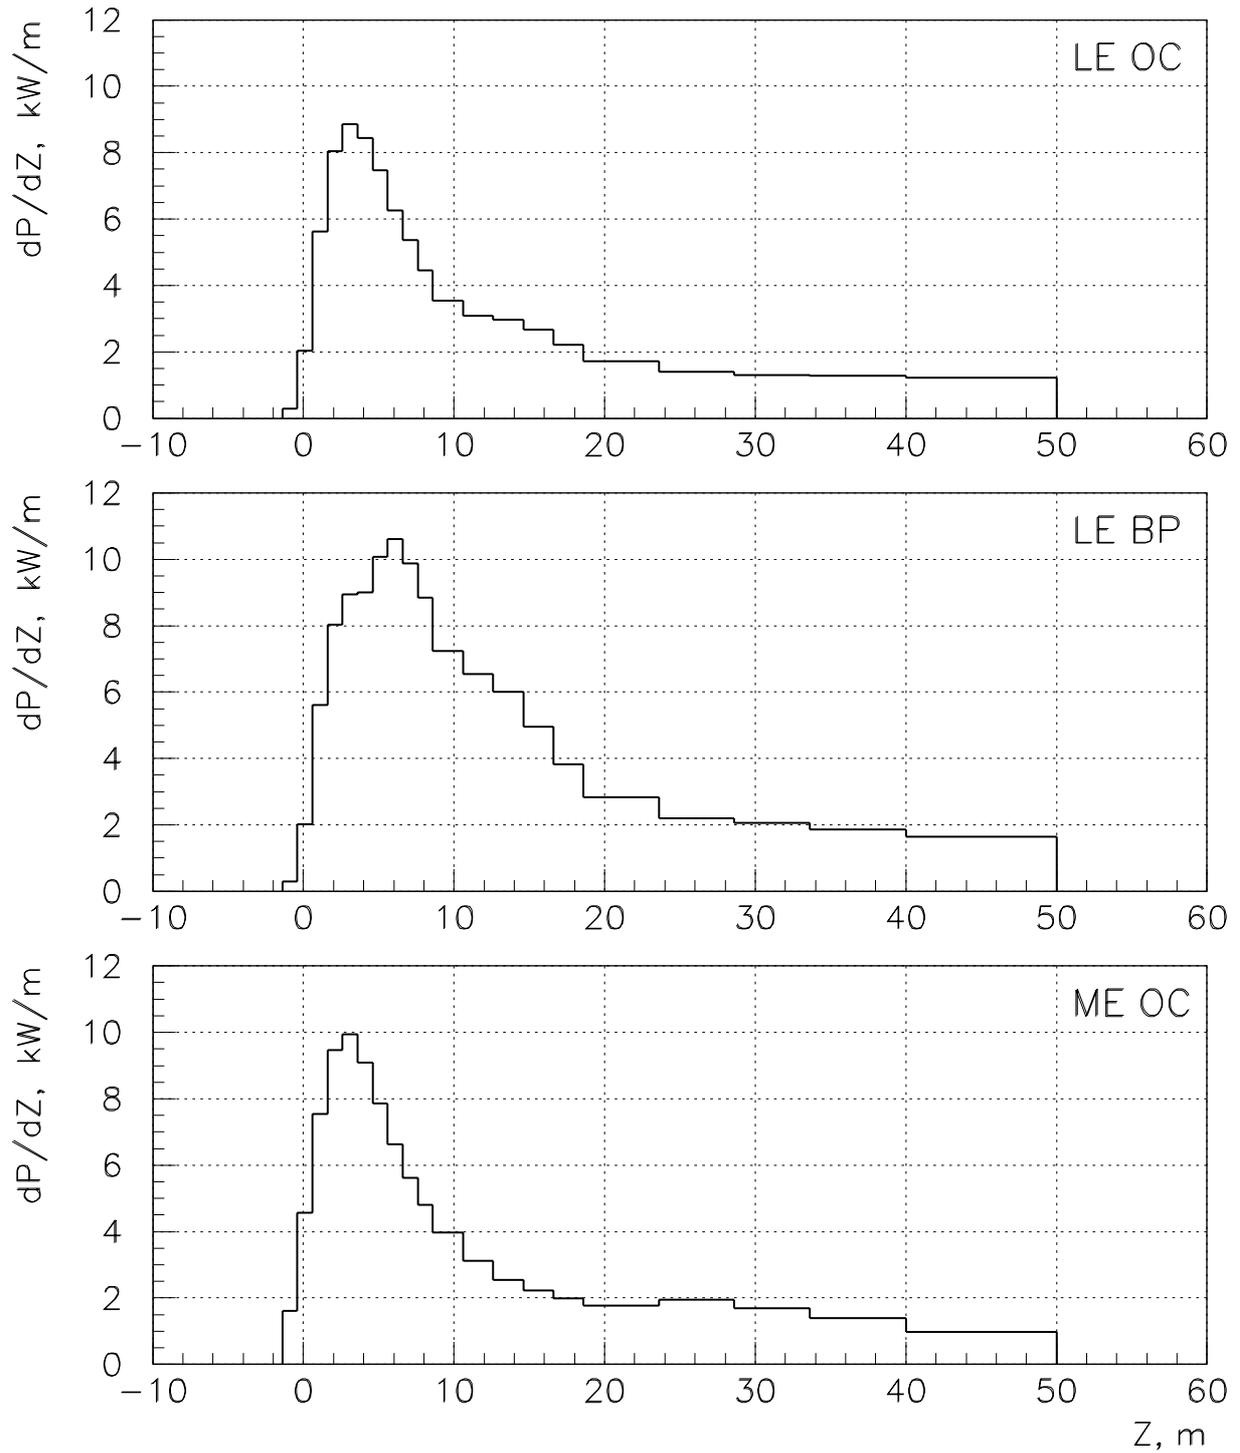


Figure 2: Longitudinal distributions of an average power deposited in the target pile for different configurations of the beam-line in case of the regular operation mode (the upstream end of horn1 corresponds to $Z = 0$).

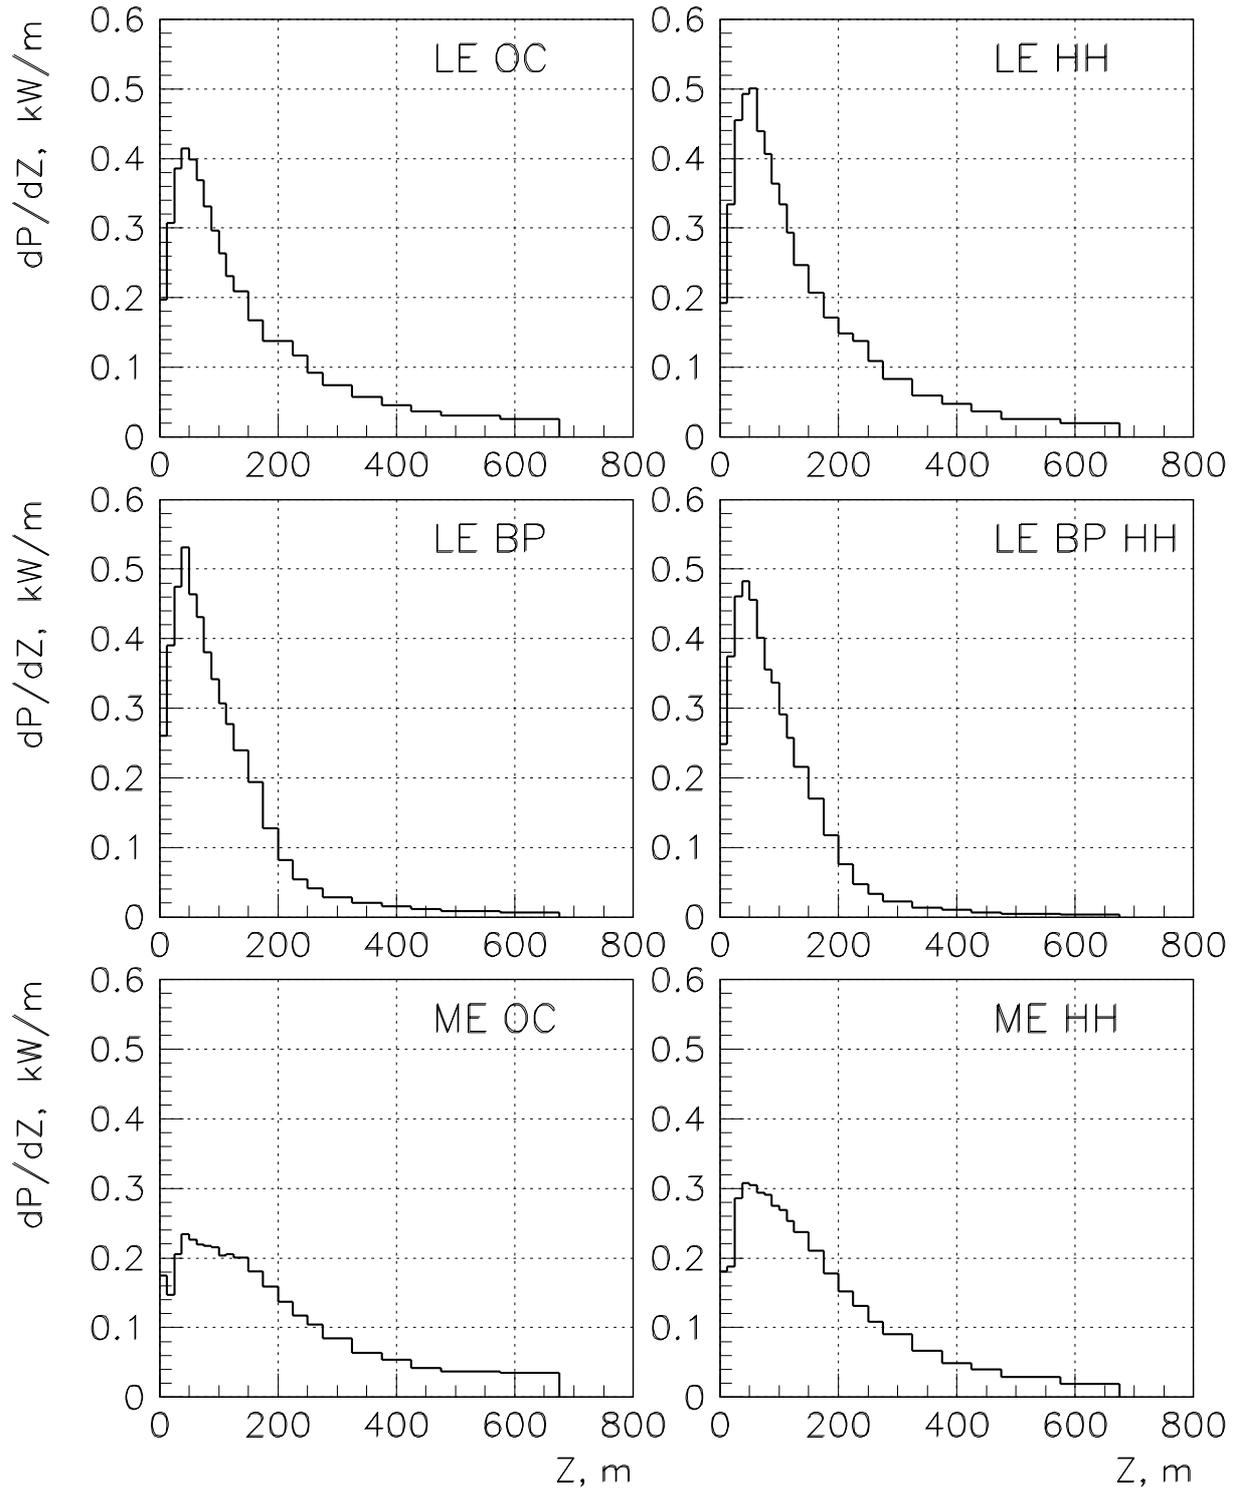


Figure 3: Longitudinal distributions of an average power deposited in the steel pipe of the decay region for different configurations of the beam-line in case of the regular operation mode.

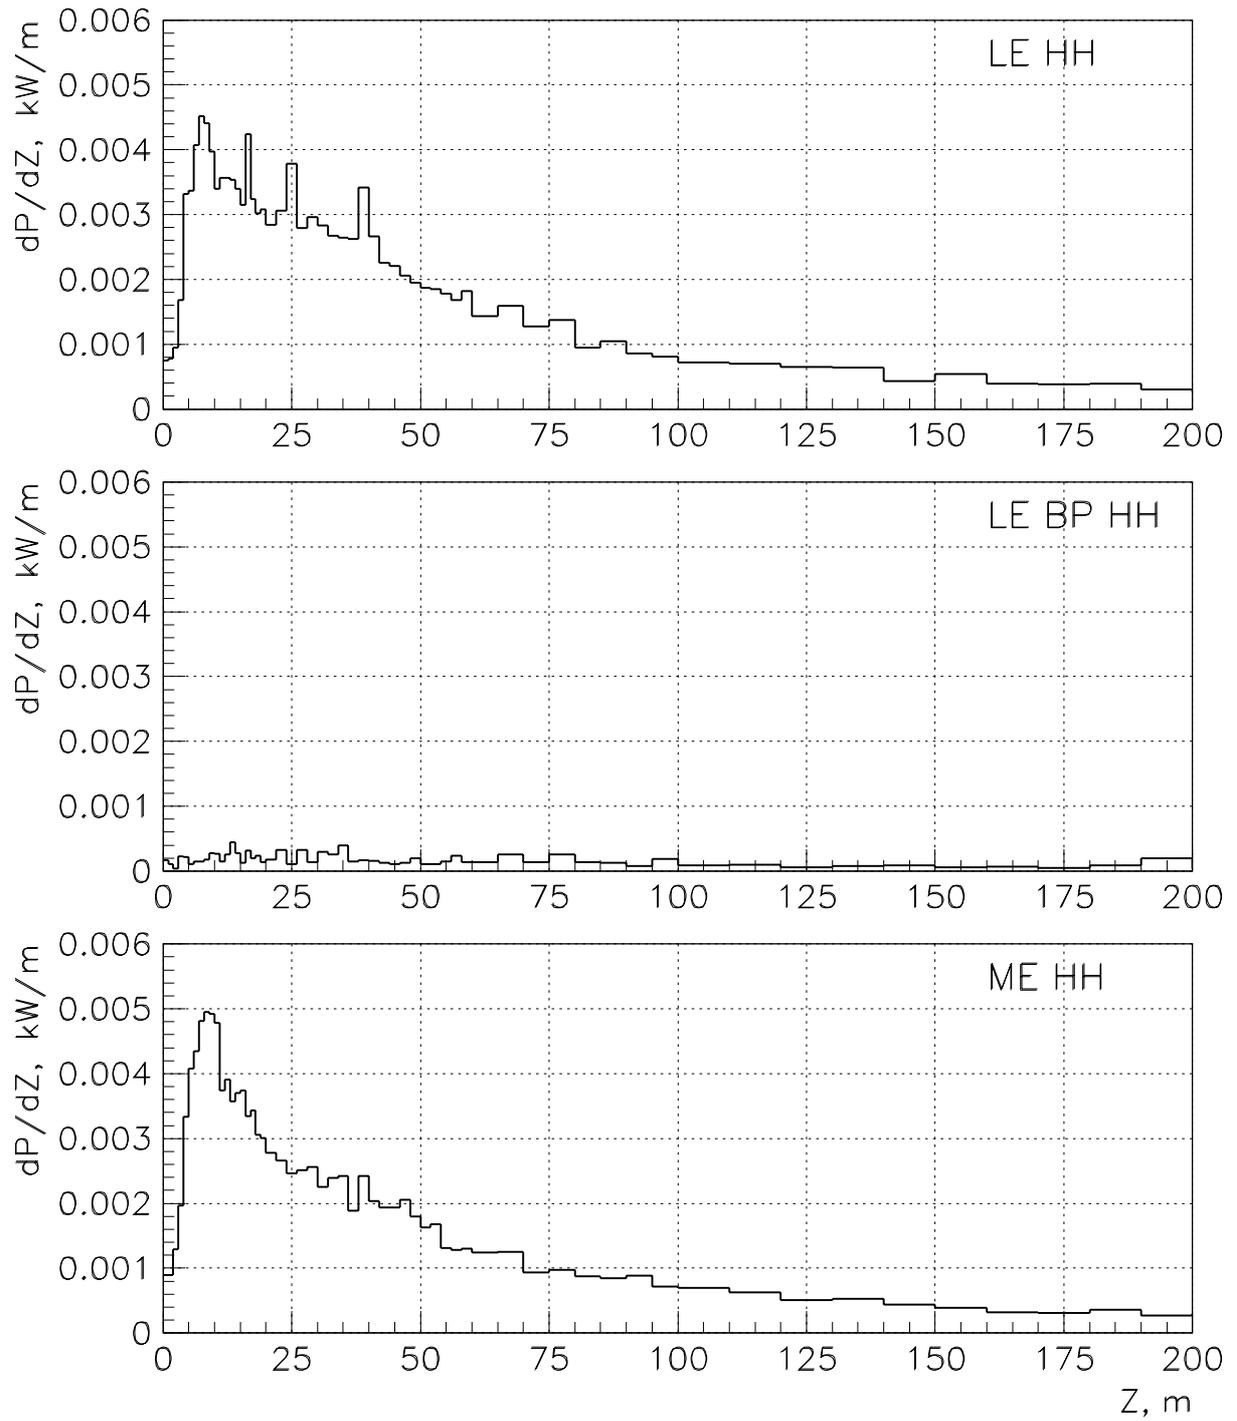


Figure 4: Longitudinal distributions of an average power deposited in the hadronic hose wire for different configurations of the beam-line in case of the regular operation mode.

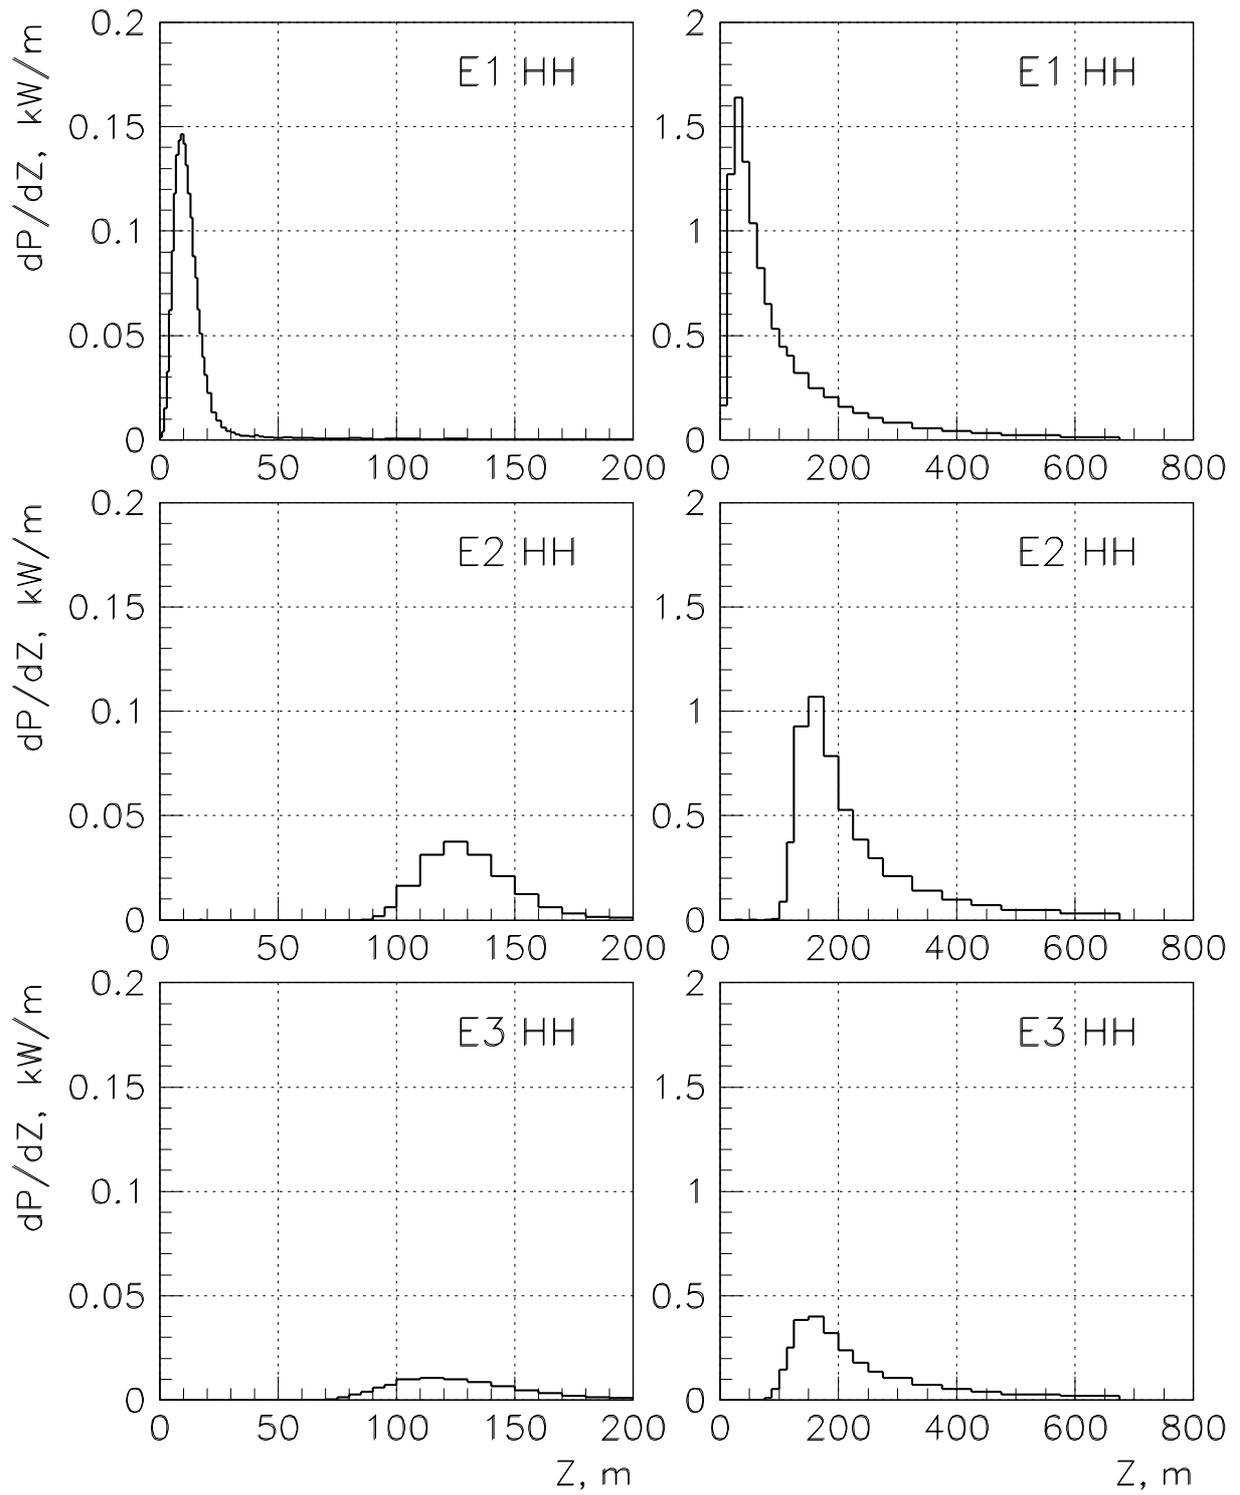


Figure 5: Longitudinal distributions of an average power deposited in the hadronic hose wire (left) and steel pipe (right) in cases of the different emergency situations (see Table 2).

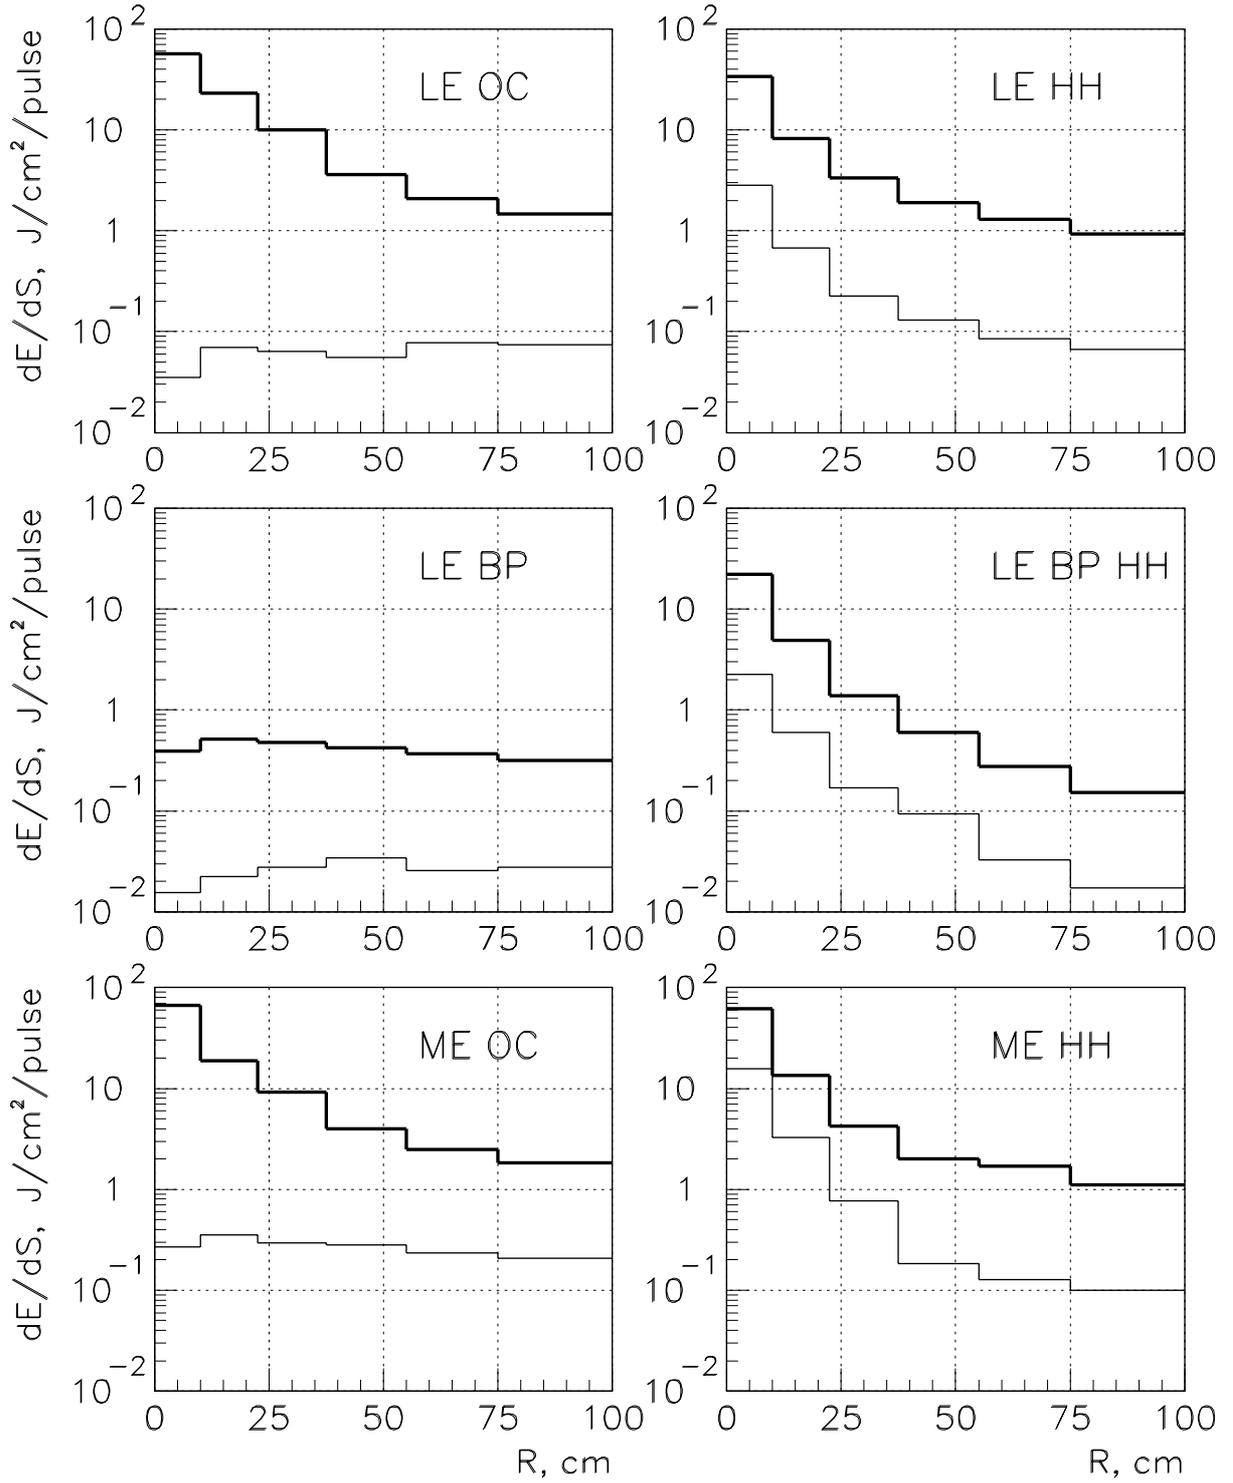


Figure 6: Radial distributions of the beam energy density in front of the absorber for different configurations of the beam-line in case of the regular operation mode: bold line – all particles, thin line – π^\pm, K^\pm -mesons.

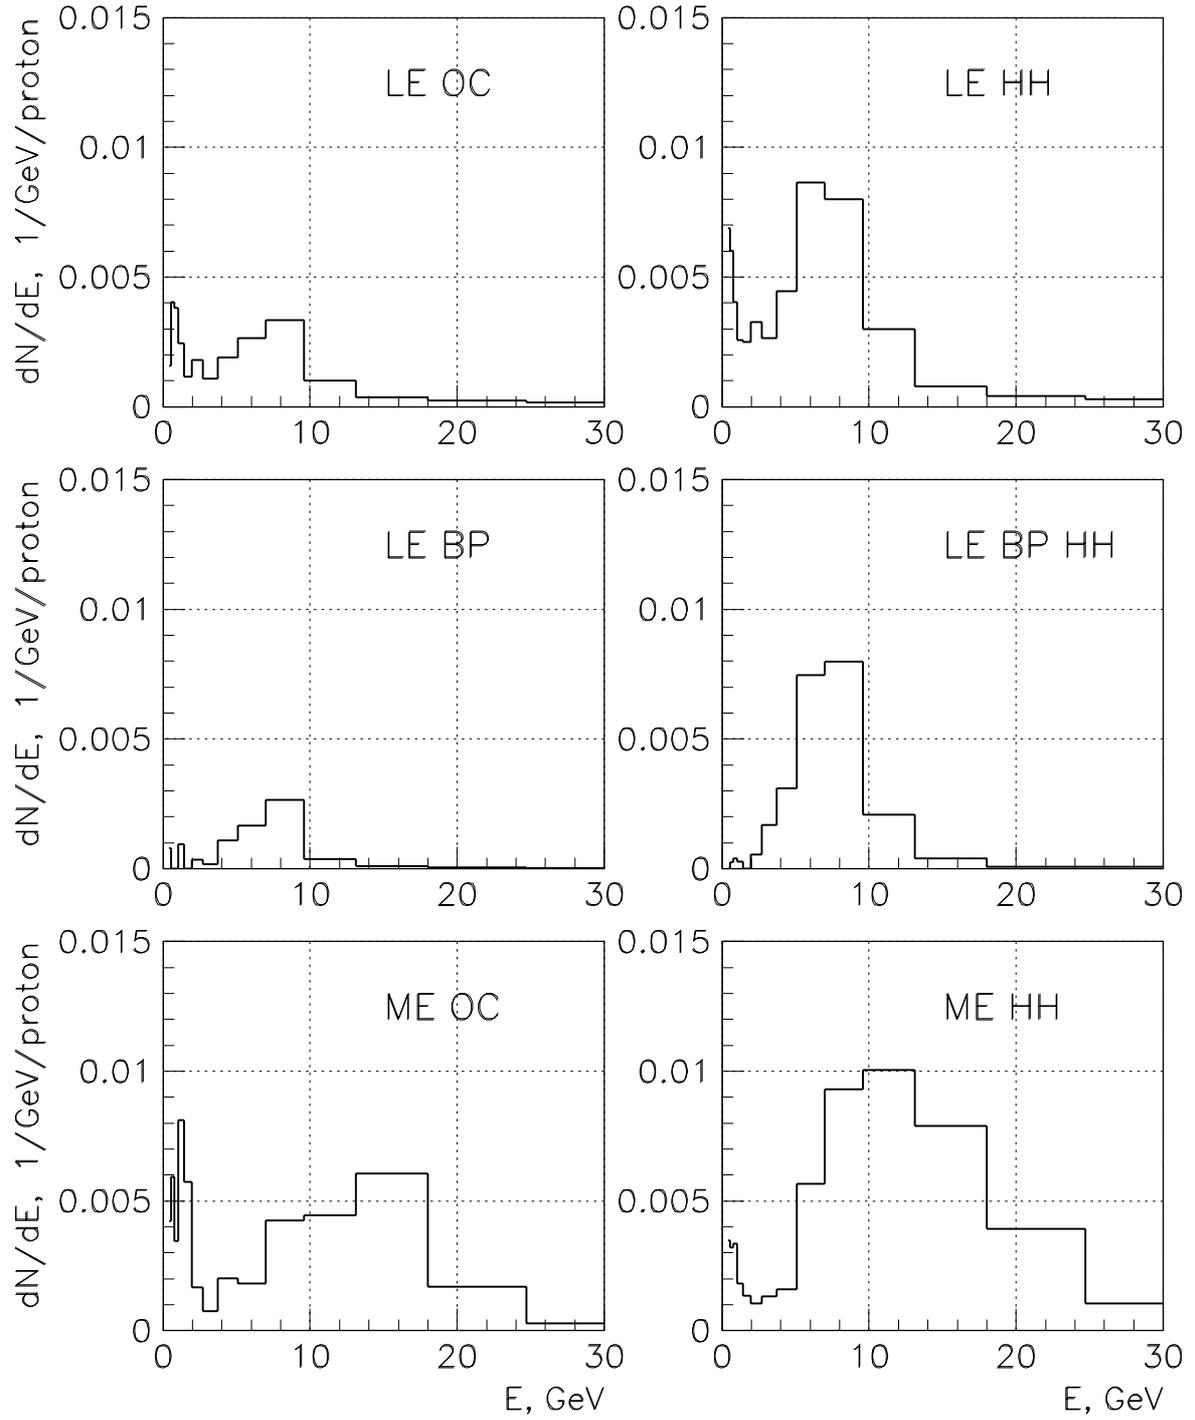


Figure 7: Energy spectra of π^\pm, K^\pm -mesons with $E > 400$ MeV in front of the absorber for different configurations of the beam-line in case of the regular operation mode.

References

- [1] The PH2M Two Horns Focusing System for the NuMI Project, Protvino, 1999, NuMI-B-471.
- [2] Advanced Conceptual Design of the Low Energy Target and Beam Plug, Protvino, 1999, NuMI-B-543.
- [3] The NuMI Facility Technical Design Report, Fermilab, 1998.
- [4] J.Hylen et al., Proposal to Include Hadronic Hose in the NuMI Beam Line, NuMI-B-542, Fermilab, 1999.
- [5] Advanced Conceptual Design of the NuMI Hadron Beam Absorber Core, Protvino, 2000, NuMI-B-652.
- [6] J.Hylen et al., NuMI Hadronic Hose Technical Design Report, NuMI-B-610, Fermilab, 2000.