

Fermi National Accelerator Laboratory

FERMILAB-TM-2083

**Tritium Production in the Dolomitic Rock
Adjacent to NuMI Beam Tunnels**

A. Wehmann and S. Childress

*Fermi National Accelerator Laboratory
P.O. Box 500, Batavia, Illinois 60510*

May 1999

Disclaimer

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, expressed or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

Distribution

Approved for public release; further dissemination unlimited.

Copyright Notification

This manuscript has been authored by Universities Research Association, Inc. under contract No. DE-AC02-76CHO3000 with the U.S. Department of Energy. The United States Government and the publisher, by accepting the article for publication, acknowledges that the United States Government retains a nonexclusive, paid-up, irrevocable, worldwide license to publish or reproduce the published form of this manuscript, or allow others to do so, for United States Government Purposes.

NuMI-B-495

Tritium Production in the Dolomitic Rock Adjacent to NuMI Beam Tunnels

A. Wehmann, S. Childress

January 15, 1999

(updated May 13, 1999)

Abstract

This paper is a discussion of tritium production levels we might expect in the Dolomitic rock adjacent to NuMI beam tunnels.

Contents

1	Introduction	3
2	Tritium Production in Groundwater	3
2.1	Interpreting the Borak et. al. water sample activity	6
3	Normalized activity from Borak et. al.	7
3.1	Projection for NuMI Dolomite	7
3.2	Comparison with TM-2009	9
3.3	Discussion of Uncertainties	11
4	Comparisons to Other Calculations	11
4.1	CERN Papers	12
4.2	NuMI TDR	13
5	Impact for Shield Design	15
6	Summary and Recommendations	16
	References	18
A	Hadron Flux and Threshold Energy Dependence	20
A.1	Flux Calculation	20
A.2	Study of Sensitivity to Spectrum Shape	24
B	Tritium cross section from Borak et. al.	25
C	Independent Validation of Results	30

1 Introduction

In order to assess the tritium concentration to be expected in NuMI monitoring wells we need both a model for tritium production in resource groundwater and some idea of the motion of the groundwater in the vicinity of the beam tunnels. Both these subjects have received attention in earlier papers and reports (References [1] & [2] & references cited therein).

In this paper we provide a new interpretation of tritium production, which we believe is more consistent with existing data. In developing this, we have closely examined data for tritium production in glacial till and in rock samples. A review of this data has led us to a model which provides an interpretation of tritium produced in either material, as well as an explanation of the anomalously low tritium production seen in a NuMI Dolomite sample irradiation test.

We then compare tritium production expectations, under static conditions, with earlier NuMI calculations and those for a CERN design. Finally, we point out that groundwater in the rock surrounding the NuMI tunnels should not be static (in the time period of extended NuMI beam operation), and we present our insight regarding the expected benefits (i.e. lower radionuclide concentrations) of the motion of the groundwater.

2 Tritium Production in Groundwater

The paper by Borak et. al. [3] describes the results of irradiation of soil samples near two proton synchrotrons¹. The irradiation resulted in induced radioactivity, which was measured by radiochemical analysis. In addition, studies were made to see which of the radionuclides could be leached by water.

A careful reading of the Borak et. al. paper convinces us that tritium is a special case. Besides the fact that the soil samples could not be directly counted for ^3H (due to the low beta endpoint energy (0.02 MeV)) their paper found that the transferable ^3H appears to be associated with the amount of water in the soil at the time of irradiation. They also found that a sample of well water simultaneously exposed at the BNL AGS acquired a tritium activity that was 1/3 the activity of the water in the soil samples. These observations lead us to conclude that ionized

¹The Alternating Gradient Synchrotron (AGS) at the Brookhaven National Laboratory (BNL) and the Zero Gradient Synchrotron (ZGS) at the Argonne National Laboratory (ANL).

tritium is produced from both soil molecules and the oxygen atoms in water. The tritium that is produced from soil molecules, and which becomes bound in a water molecule, has engaged in a two-step process—production and then entrapment. The typical range of the ionized tritium² is significantly less than 1 cm (see Figure 1); therefore the soil molecule and water molecule must be in proximity for entrapment in water to occur. Tritium produced by spallation from the oxygen atom in a water molecule, which ends up bound in a water molecule, also results from a two-step process. If one assumes that this two-step process is the only method by which tritium ends up bound to a water molecule, it would explain the Borak et. al. observation that none of the ³H in the radioactive leach waters was transferred to non-irradiated soil when the two were batch processed together³.

The other radionuclide, ²²Na, found to be important in the Borak et. al. paper can be leached⁴ from irradiated soil by non-radioactive leach water, and does go in the other direction when radioactive leach water is batch processed with non-irradiated soil. Borak et. al. calculate the distribution coefficient, K_d , for ²²Na, and explain how its value is associated with the retardation of the movement of ²²Na with groundwater. Because tritium was found by Borak et. al. to have a distribution coefficient, K_d , with value zero, it suffers no retardation effect and travels with the velocity of the groundwater.

In the case of tritium, the transferable tritium is present in the water in the soil samples at the end of the irradiation; the batch processing with “leach water” mixes the “leach water” with the water in the soil sample and tritium enters the “leach water” by simple mixing⁵—not processes involving any tritium bound to soil molecules. With this point of view in mind, it is extremely important for a tritium mea-

²From the PDG booklet [4] we can find a value for $\frac{R}{M} = 1 \frac{g}{cm^2} GeV^{-1}$ for the range of a heavy charged particle in Carbon at $\beta\gamma (= p/Mc) = 2.5 \times 10^{-1}$. For tritium $M = 2.817 GeV/c^2$. This works out to be a range of $2.8 g/cm^2$ in Carbon for ionized tritium having an energy of 88 MeV.

³A corollary is that a leaching process does not remove a substantial amount of tritium from soil (or from rock). Water which becomes tritiated has to be present in the sample during the irradiation.

⁴This leaching process is presumed to be chemical in nature. The sodium becomes a dissolved ion in water.

⁵Borak et. al. used a quantity of “leach water” that was 10 times the weight of their samples. They observed that, once corrected for dilution, the “leach waters” accounted for all of the ³H measured by the bake out process. Baker et. al. [6] used a quantity of “leach water” that was equal in weight to the weight of their samples, and did not account for all of the ³H from their bake out measurement in all cases. The amount of water used may have been a factor in how much tritium could be removed by the “leaching” process. Had Baker et. al. used the larger quantity of water, the fraction of tritium “leached” after 1 hour of stirring might have been significantly higher—particularly for the sample they describe as “Fermilab soil”.

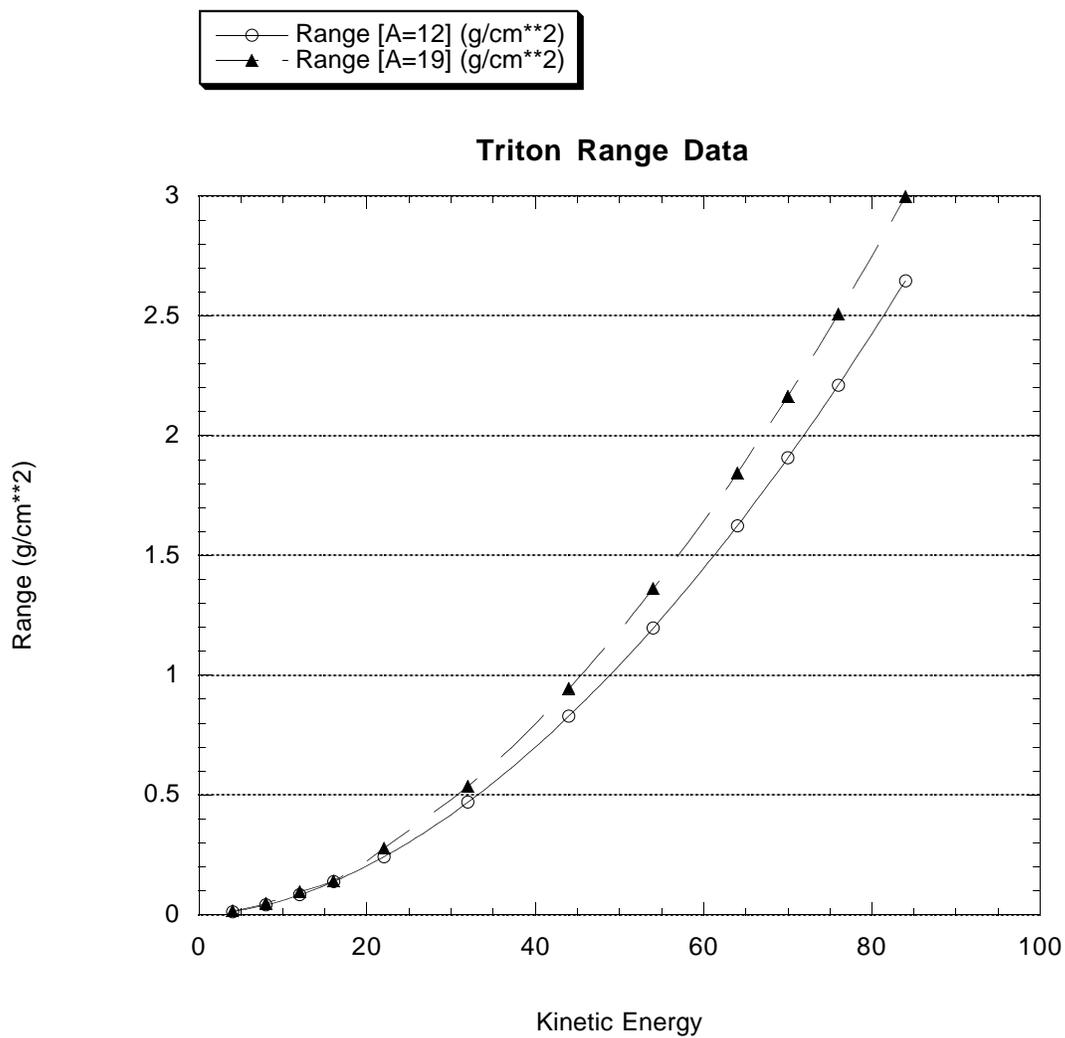


Figure 1: Triton range in Carbon (A=12) and in material with A=19 (close to soil weighted A value of 20.51). Units are g/cm² and MeV. The values come from reference [5] (courtesy of Alex Elwyn).

surement to preserve the water present in the sample at the time of irradiation.

Borak et. al. [3] irradiated a sample of well water at the BNL AGS, together with the soil samples denoted as B-1, B-2, B-3 (three depths from borings made along the proposed neutrino beam line). They also irradiated a sample of glacial till at the ANL ZGS; this was denoted as sample A-1 and came from beam elevation in the vicinity of the main ring injection-extraction gallery (approximately 20 ft below ground level⁶).

Borak et. al. observed that ³H is produced in both water and soil. In the case of soil, the water and the soil are intimately mixed. In rock, a good portion of the water resides in fractures in the rock. To obtain the rate of tritium production in rock, one can expose rock samples to a monitored hadron flux—such as was done for NuMI⁷.

2.1 Interpreting the Borak et. al. water sample activity

As already indicated, Borak et. al. tells us that the water sample irradiated simultaneously with samples B-1, B-2, & B-3 acquired a tritium activity that was 1/3 the activity of the water in the soil samples. We can interpret this to mean that the water sample was sized and exposed such that its tritium activity was due mostly to production of tritium in the ¹⁶O atoms in the water molecules. It is our hypothesis that there was a limited amount of other material close enough to all the water molecules to have tritium produced in that material and then displace a hydrogen atom in nearby water—such as there is in the case of water dispersed in the pores of soil. The near presence of other, more dense material could significantly impact the results seen.

⁶It is indicated in Table 4 of Borak et. al. that Sample B-3 was taken at a depth of 15-22 feet; that sample is characterized as “Gray clay”. Sample B-1 was at depth 3-6 feet and is characterized as “Gray sandy clay”; sample B-2 was at depth 6-12 feet and is characterized as “Red sandy clay”.

⁷The water that would be found in fractures should also be included appropriately in the exposure. It is questionable that the measurements done for NuMI took proper account of water that would have been found in the rock fractures. Dave Boehnlein has confirmed that the rock samples used had been left unsealed in a dry environment for months prior to irradiation. It is presumed that much of the original water contained within the samples evaporated away in this dry environment.

3 Normalized activity from Borak et. al.

In Table 4 of Borak et. al. [3] the values for tritium activity were normalized both to the amount of soil and to the amount of water contained in the soil. The values normalized to the amount of water in the soil varied significantly less from sample to sample than did the activity values normalized to the amount of soil. The activity data is plotted in Figure 2. The authors comment that this observation verified their conclusion that the transferable ^3H appears to be associated with the amount of water in the soil at the time of irradiation.

The Borak et. al. “leaching” measurements utilized 10 parts by weight of water to one part soil. If leaching from soil to water had a major role in the resultant tritium levels in water, we would expect very different distributions for the plots in Fig. 2. The expectation would be for leached activity levels normalized to grams of soil which would be largely independent of the % water fraction present during exposure. Similarly, when plotted normalized to the % water fraction in the soil during activation the distribution would vary inversely with the % fraction of water in the sample. The small variation (20%) seen in the lower left plot of Fig. 2 has a slope much smaller, and in the opposite direction from, that which would be expected for ^3H activity due to a leaching mechanism.

The ^3H activity (at saturation) per g of H_2O averaged for the four soil samples in Table 4 of Borak et. al. is $1.4 \times 10^{-1} \frac{\text{pCi}}{\text{g}}$. This is for a unit flux of hadrons (units $\text{cm}^{-2} \text{sec}^{-1}$), with an energy threshold of 30 MeV.

3.1 Projection for NuMI Dolomite

To use the number of $1.4 \times 10^{-1} \frac{\text{pCi}}{\text{g}}$ for NuMI Dolomite calculations (in particular for the decay tunnel), we make the observation⁸ that it is the average of $\frac{\sum_i n_i \sigma_{i3}}{(.037)}$. Equation 16 in Appendix B illustrates how we might convert the value of $\sum_i n_i \sigma_{i3}$ from one mix of elements (soil) to another (Dolomite). For

$$\frac{[\sum_i n_i (\frac{A_i}{16})^\alpha]_{Dolomite}}{[\sum_i n_i (\frac{A_i}{16})^\alpha]_{soil}}$$

we calculate 1.00011 for $\alpha = 2/3$ and 1.00307 for $\alpha = 0.8$. Thus, the mix of elements hardly matters, when considering soil or Dolomite.

⁸See the discussion in Appendix B.

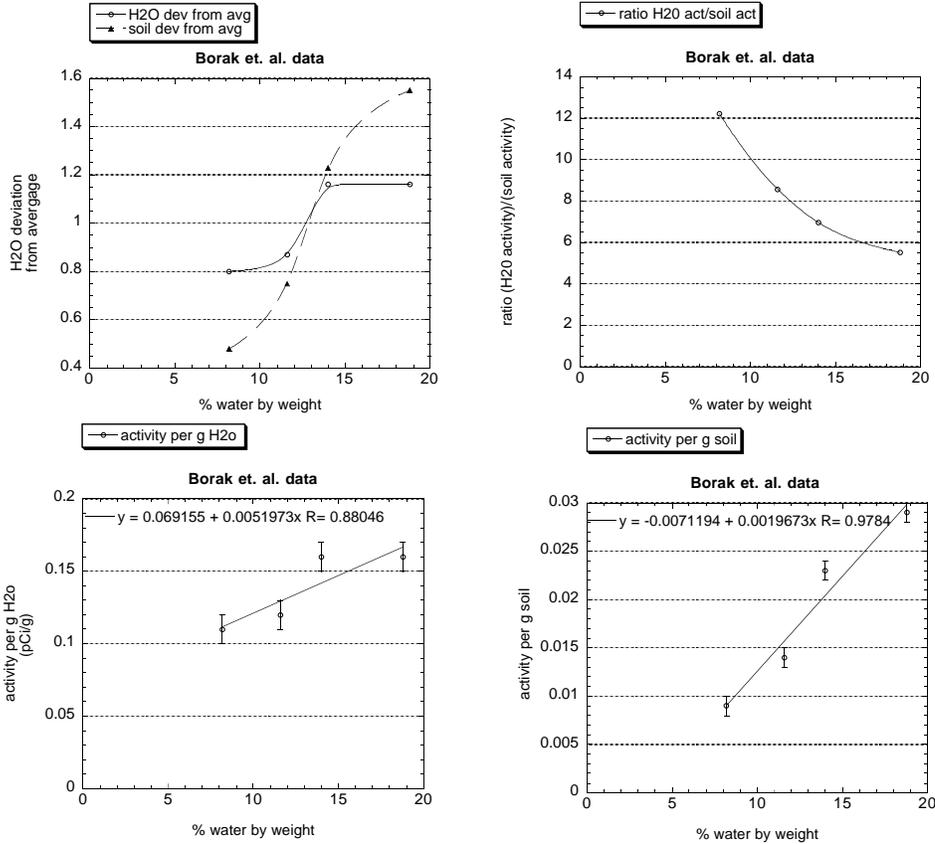


Figure 2: When tritium activity in the four Borak et. al samples is normalized to the soil weight, the largest deviation from the average is 59%; when tritium activity is normalized to the weight of the water in the sample, the largest deviation from the average is 20%. This is shown in the top left plot. The percentage of water by weight in the four samples varied from 8.2% to 18.8%. The top right plot shows the ratio of activity normalized to grams of water and activity normalized to grams of soil. The bottom left plot shows the activity levels normalized to the weight of the water found in the soil samples; the bottom right plot shows the activity levels normalized to the weight of the soil samples. The error bars shown on the bottom two plots are simply ± 0.01 on the left and ± 0.001 on the right, and represent the level of the least significant digit in the data values.

In Appendix A.1 we discuss calculating the flux of hadrons for NuMI from star density values. Since star densities are obtained using a threshold kinetic energy⁹ of 48 MeV it is necessary to increase the value for hadron flux to account for the lower threshold of 30 MeV that is included in the Borak et. al. flux normalization. This topic is discussed in Appendix A.1.

Utilizing equations 7 & 9 in Appendix A.1 we then have

$$\phi_{30} = (1.456)(4223) = 6.148 \times 10^3 \frac{\text{particles}}{\text{cm}^2 \text{ sec}} \quad (1)$$

Peak saturated tritium activity using the NuMI assumptions (from TM-2009, discussed in Appendix A.1) is then¹⁰

$$(.14) \times (6.148 \times 10^3) = 861 \frac{\text{pCi}}{\text{g}} \quad (2)$$

This corresponds to the activity in the groundwater at the edge of the tunnel (where the Dolomite begins), under static conditions.

3.2 Comparison with TM-2009

TM-2009 [2] calculated a ³H activity¹¹ of $10 \frac{\text{pCi}}{\text{ml}}$. This number is gotten by averaging star density in the rock between the tunnel wall and 1.5 meters further out (where the star density has decreased to 1% of its peak value). The average star density was calculated to be 0.19 times the peak star density. TM-2009 used a “90 %” leaching factor ω_i (equal to 0.27) to arrive at the tritium concentration of $10 \frac{\text{pCi}}{\text{ml}}$. TM2009 [2] calculates a decay factor

$$(1 - e^{(-3.15 \times 10^8 * 1.79 \times 10^{-9})}) = .431$$

which represents the difference between ten years of running and saturation.

⁹CASIM ([7]) has a momentum cutoff of 300 MeV/c built in; MARS ([8]) has an option to choose to run with this same momentum threshold. For neutrons, a momentum threshold of 300 MeV/c corresponds to a kinetic energy of 48 MeV.

¹⁰In equation 2 the number 6.148×10^3 is unit-less, because it is being used as a ratio of the flux in equation 1 and the unit flux that is the case for Table 4 of Borak et. al. The units in equation 2 could have been written pCi/ml, since we are calculating activity in the water in the Dolomite.

¹¹This activity corresponds to “90% leaching”. The TM-2009 number for “99% leaching” is $5.4 \frac{\text{pCi}}{\text{ml}}$.

The use of a “90%” leaching value has been questioned by the various committees that the Fermilab Director appointed to review past targeting vulnerabilities. In response, an ad hoc groundwater working committee appointed by D. Cossairt is considering using a leaching factor ω_i that would correspond to the amount of water present in the medium. In the case of NuMI Dolomite, one such measure is the rock porosity, which has been measured as 0.19 (see Reference [9]). If one assumes this porosity is filled with water, then one calculates ω_i as

$$w_i = \frac{.19}{2.67} = 0.071 \quad (3)$$

The value of rock density being used here (2.67) is that from TM-2009. The ratio of these differing values of ω_i is 3.8.

In calculating a tritium activity of 10 pCi/ml, TM-2009 used a K value¹² of 0.03 (taken from TM-1851 [10]). The value of K = 0.03 was determined from preliminary results from the study described in Reference [6]. Based upon the considerations in this paper, we would use the value of 0.035—given in equation 17 in Appendix B.

Collecting together the factors, we scale the TM-2009 activity value of 10 pCi/ml in order to compare to the saturated peak value of activity at the tunnel wall in equation 2; we then have

$$\left[\frac{0.27}{.071} \right] \left[\frac{1}{.431} \right] \left[\frac{1}{0.19} \right] \left[\frac{0.035}{0.03} \right] \times 10 = 542 \text{ pCi/ml} \quad (4)$$

If we wish to compare this to the 861 pCi/ml given in equation 2 (using the ³H activity from Borak et. al.), one further factor is necessary, since the star density used to get the value in equation 4 had an energy threshold of 48 MeV. To make the comparison we need to use a star density value that has a threshold¹³ of 30 MeV. The extra factor needed is given in equation 9 (Appendix A.1). Applying

¹²Probability of producing one radionuclide atom per inelastic collision (star). See Reference [11] for early use of this notation.

¹³Regarding the 48 MeV threshold, Reference [12] says “. . . this threshold is introduced mainly for convenience of computation. At low energies the Hagedorn-Ranft production model is not valid. Furthermore the cross sections vary rapidly with energy in this region.” However, Reference [13] assumes the non-elastic cross sections to be energy independent from about 30 MeV up to the highest energy considered in that reference. Examination of Reference [14] convinces us that the tritium cross sections of interest are sufficiently stable between 30 MeV and 48 MeV that we don’t need to consider them as varying.

this factor we have

$$(542)(1.456) = 789 \text{ pCi/ml}$$

We note that the measured K values for tritium vary, both by material type, and in a manner correlated with the amount of water that existed in the material sample at the time of irradiation (see Tables 6 & 7 in Appendix B). Such a dependence on the amount of water¹⁴ contained in the sample could explain the large variation in the K values seen in Reference [6]. Utilizing the ³H activity measured by Borak et. al. [3] has the advantage (compared to using a K factor) that it starts out with a number that is already ³H activity expressed per gram of water in a medium. As has been noted (see Section 3.1), to use the Reference [3] ³H activity we had to obtain a number for the flux of hadrons with a 30 MeV threshold, and we had to extend it to a different medium.

3.3 Discussion of Uncertainties

As indicated in Figure 2, we have uncertainty in the value of 0.14 (used in equation 2) of the order of 20%, just due to the variation in the value of activity normalized to water for the four samples in Table 4 of Reference [3]. In extending the hadron energy spectrum from 48 MeV to 30 MeV we have relative uncertainties in the flux value¹⁵ of order 10%, as discussed in Appendix A.2. The astute reader could make a list of other uncertainties (which are not considered in detail here).

4 Comparisons to Other Calculations

In Section 3.2 we have already compared two methods of calculating tritium concentration in groundwater. The first method utilized the measured activity (from Reference [3]) per unit flux (30 MeV threshold) per gram of water—adjusted to NuMI conditions as given in Reference [2]. The second method of calculation was that given in reference [2], which used the K value¹⁶ of 0.03 ³H atoms per star from Reference [10]. We have seen in Section 3 that the two methods of calculation can be made to agree to a reasonable level if the amount of “leach” water in Reference

¹⁴Unfortunately References [6], [15], and [16] don’t quote the fraction of water contained in the samples measured.

¹⁵The flux was calculated in equation 1.

¹⁶See Table 6 for a compendium of K values.

[2] is made equivalent to the amount of water that would fill the Dolomite porosity, rather than the amount of water¹⁷ that is based upon a “90% leaching”. In the second method we also made a small adjustment to the K factor.

We’d like to continue making comparisons and this time refer to CERN calculations for their proposed long baseline neutrino beam, as well as the NuMI Technical Design Report [1].

4.1 CERN Papers

One CERN paper of interest¹⁸ is entitled “Initial Estimates of Radiological Parameters of Environmental Interest for the CERN/INFN Gran-Sasso Neutrino Project”[17]. On page 9 it discusses radionuclides produced in the rock (“Molasse”) surrounding their underground tunnels. For ³H it gives a value 9×10^{-10} Bq/cm³ in water¹⁹, for a star density in the rock with value 1 cm⁻³. It says that to this must be added the direct production of ³H by spallation reactions in the oxygen of the water, which results in an additional 1×10^{-10} Bq/cm³. For their conditions they quote 45 stars in rock per proton. In their Table 3 they list $K = 0.05$ ³H atoms per star in their rock²⁰.

A second CERN paper [18] gives further information regarding the numbers found on page 9 of Reference [17]. It says that the proportion by volume of water in the Molasse is estimated to be 10%. It gives the number of nuclei of ³H produced per star in water as 0.113 & further says that the interaction mean free path in water is approximately twice that in their rock.

With this information at hand we can verify their numbers as follows:

Spallation in Rock

¹⁷In Reference [10] these amounts were determined by percolation measurements made by Sam Baker on a column of Neutrino Area sand and gravel. These measurements were described in Reference [15].

¹⁸Reference [17] was kindly provided to us by Alex Elwyn. He also provided us with a subsidiary reference ([18]).

¹⁹1 Bq equals 1 disintegration s⁻¹ (or $\frac{1}{3.7 \times 10^{10}}$ Ci.)

²⁰From a private communication with one of the authors (G. R. Stevenson) J. D. Cossairt learned that this K value derives in some manner from Borak et. al. [3]. It is not based upon independent measurements. In equation 18 we compute a value of $K = 0.048$ for the Molasse, so we think we understand the published value of 0.05.

$$\begin{aligned}
.05 &= {}^3\text{H atoms per star in rock} \\
\text{star density} &= 1 \text{ cm}^{-3} \text{ (in rock)} \\
\left[\frac{.05}{(17.75)(3.15 \times 10^7)} \right] &= 8.9 \times 10^{-11} \text{ Bq/cm}^3 \text{ (normalized to 1 cm}^3 \text{ of rock)} \\
&= 8.9 \times 10^{-10} \text{ Bq/cm}^3 \text{ (normalized to 10\% water in rock)}
\end{aligned}$$

where $\lambda = (17.75)^{-1}$ years²¹.

Spallation from ¹⁶O in water

$$\begin{aligned}
0.113 &= {}^3\text{H atoms per star in water} \\
0.5 &= \text{star density per cm}^3 \text{ of water} \\
\left[\frac{(.113)(0.5)}{(17.75)(3.15 \times 10^7)} \right] &= 1 \times 10^{-10} \text{ Bq/cm}^3
\end{aligned}$$

The number most relevant to our calculations in Section 3 is the number $K = 0.05$ ³H per star in their rock. It is to be noted that the CERN papers are using the volume of water present in the Molasse and that all of the tritium produced in the rock is assumed to be present in that water; there is no concept of a “90% leaching” volume of water being used.

4.2 NuMI TDR

The radiation safety chapter (Chapter 4) of the NuMI TDR [1] makes reference to TM-2009 [2] and a paper by Cossairt and Cupps [19]. The result of the considerations in Chapter 4 is a K value of 0.0076 ³H atoms per star in rock. It is to be noted that this value is a factor of 10 below the equivalent number for Fermilab soil (Reference [10]) and a factor of 6.6 below the equivalent value in the CERN papers (References [17] & [18]). TDR Chapter 4 continues the assumption²² that the

²¹ $\lambda = \left(\frac{12.3 \text{ yr}}{\ln 2} \right)^{-1}$.

²²This assumption is consistent with current Fermilab methodology, which is given in Reference [20]. This methodology is also incorporated into the Fermilab ES&H Manual [21]. This methodology was developed for the case where irradiation takes place in unconsolidated media (e.g. soil)

tritium must be leached out of the rock. It places the tritium produced in a “90% volume” of water; this is a volume based upon a combination of leaching measurements found in References [15] and [6]. Table 4-6 in the TDR gives the weight factor ω_3 as 0.325. TDR Chapter 4 boosts the “leached” tritium numbers by a factor of 1.3, in order to account for direct production of tritium in groundwater.

Starting from equation 2, we now calculate the peak saturated tritium concentration that would correspond to the configuration in the NuMI TDR [1]. Reading from Figures 4-12 and 4-15 a working limit for star density at the tunnel wall is the value²³ of 6×10^{-11} stars $\text{cm}^{-3} \text{p}^{-1}$. We then have

$$(861) \left[\frac{6 \times 10^{-11}}{1.3 \times 10^{-11}} \right] = 3,974 \frac{pCi}{g} \quad (5)$$

Proceeding with a comparison based upon utilizing a K value, we make the argument that the tritium concentration numbers in Chapter 4 of the NuMI TDR are low—first, by having K low, and second, by diluting the tritium in too much water. These two factors are²⁴

$$\frac{.035}{.0076} = 4.6 \quad (\text{ratio, K factor, atoms of } ^3\text{H per star})$$

$$\frac{.325}{.071} = 4.6 \quad (\text{ratio, volume of water used for } ^3\text{H concentration})$$

In the second of these equations 0.325 comes from Table 4-6 of the NuMI TDR & 0.071 was first seen in equation 3 of this paper. The product of these two factors is 21. This number should be divided by 1.3 because of the contribution that was added for direct production of tritium in water; the resultant factor²⁵ is 16.

above an underlying aquifer, and the water carrying radionuclides must migrate to the underlying aquifer to be subject to regulatory consideration. We question the validity of this methodology for the very different NuMI environment. Also, we believe that it is not fully consistent with the data of Reference [3].

²³TM-2009 [2] used 1.3×10^{-11} stars $\text{cm}^{-3} \text{p}^{-1}$ for the star density at the decay tunnel wall. Appendix A.1 used this same number for star density, to calculate the flux of hadrons to use in equation 1. TDR Figures 4-12 and 4-15 indicate a band of limiting star density, ranging from 6×10^{-11} stars $\text{cm}^{-3} \text{p}^{-1}$ to 1.2×10^{-11} . Figure 4-12 indicates that this band corresponds to a range of G_{decay} from 0.10 to 0.19 (where G_{decay} is the factor relating average star density to peak star density). The star densities were calculated in the NuMI TDR using MARS [8]. Those calculated for TM-2009 [2] were calculated with CASIM [7]. MARS and CASIM are believed to agree to within a factor of two, when calculating star densities.

²⁴For the first of these factors we are using the K value of .035 from equation 17.

²⁵A general concern for any calculation employing a K factor based upon the Borak et. al. results

5 Impact for Shield Design

It is important to note that ground water in the Dolomite will not be static. Water motion will reduce radionuclide concentrations—compared to the static values presented in the previous section²⁶. Such motion includes regional flow and inflow into unlined NuMI tunnels²⁷.

The predominant water flow through the Dolomitic rock is expected to be through interlocking joints (fractures) in the rock structure. These fractures are largely vertical in orientation, with significant open structure in the upper Dolomite formations (Joliet, Kankakee and Elwood). The joints become less frequently spaced, and also largely closed, in progression through the underlying Maquoketa formations—where significant Dolomitic shale resides. The result is a vertically confined aquifer system, where the predominant regional water flow is horizontal. For saturated regions there is also water seepage through the rock matrix—with much lower hydraulic conductivity than found through the fractures. Reference [23] has calculated an average horizontal flow velocity of 5.9 m/yr (regional) in a southeasterly direction, with significant large localized variations through regions of different hydraulic conductivity. A general gradient in hydraulic conductivity ranges also exists, as a function of depth, with value decreasing for increasing depth below the top of the rock interface (with glacial till).

The presence of the unlined NuMI tunnel results in water inflow to this tunnel. A realistic calculation, including inflow effects together with the effects of a nearby large well (FNAL Well-1), would be complex. To be credible such a calculation should be done utilizing appropriate professional rock hydrogeology modeling resources²⁸. This paper is meant to provide information on which to base a discussion of the need for either more comprehensive modeling of groundwater flow around the NuMI tunnels and caverns, or a re-evaluation of the NuMI shielding design.

is that the value for $\sum_i n_i \sigma_{ij}$ that goes into the numerator for K has a flux threshold of 30 MeV in its determination, yet the prescription for obtaining the number of radionuclides is to multiply K by a star density from CASIM or MARS which has a threshold of 48 MeV in its determination. As discussed in Section 3.2 the effect of lowering the star density energy threshold can be calculated to be a factor of 1.46. Application of this factor would boost the number 16 to 23.

²⁶The reduction mechanisms are decay and limited exposure time.

²⁷Reference [22] discusses quantitatively the effects of uniform inflow.

²⁸In the time interval since 1/15/99 EarthTech has been retained as a consultant to do such modeling for the NuMI tunnels. Their first report should be ready by the end of May, 1999.

The Close Out Report ([24]) of the Lehman panel recommended (under their comments on Facility Construction, WBS 1.2) that: “Groundwater systems in rock need further study including transport mechanisms. Existing groundwater data should be compiled and analyzed to establish existing conditions for groundwater elevation and gradients. This data should be input into computer models to estimate groundwater flows into and around the tunnels and caverns to assist in predicting transport of radionuclides.” A study like that recommended should help to quantify the benefit of water inflow into the tunnels (for the reduction of tritium concentration in the groundwater resource outside the tunnels).

6 Summary and Recommendations

We have addressed with a new model expectations for tritium production in the Dolomitic rock adjacent to the NuMI beam tunnels.

As part of this process, we have revisited calculations for expected tritium activity under static groundwater conditions. Utilizing directly the results of Borak et. al. [3] for the irradiation of soil samples near proton synchrotrons, we have provided an interpretation which is consistent with the full body of this data, and which enables simple extrapolation to expectations for groundwater activation in rock, instead of soil.

We find that the Borak et. al. data shows that a subsequent leaching process after the beam irradiation period does not remove a substantial amount of tritium from soil (or from rock). Water which becomes tritiated has to be present during the irradiation. In Appendix C we discuss other sources of data that can be interpreted in a similar manner.

We also find expected tritium activation levels adjacent to the NuMI beam tunnels under static conditions which are a significant factor higher than those projected in the NuMI TDR [1], and illustrate the reasons for this discrepancy.

We believe that water inflow into the NuMI tunnels provides significant reduction of groundwater activation, but have not been able to quantify this in a manner that accounts for local variations in rock jointing. In Reference [22] J. D. Cossairt has shown a dramatic reduction, in calculations averaging effects over the tunnel length²⁹. Considerable motivation should exist for more comprehensive modeling

²⁹In fact, the velocity values in Reference [22] neglect to include the effect of the formation

of groundwater flow around the NuMI tunnels and caverns utilizing professional hydrogeology modeling resources³⁰.

We recommend that beam activation testing of Dolomitic rock samples be carried out during upcoming accelerator running, with care taken to preserve water in the samples during irradiation; such measurements should also take care to understand the effect of varying sample water percentage.

Finally, the understanding that water presence during the irradiation is essential for significant tritium activation allows possible consideration of more favorable shielding requirements for a large downstream portion of the NuMI beam tunnel in the Maquoketa formations, where saturated conditions may not be prevalent. It also enables in more straight-forward manner the utilization of solutions based on groundwater inflow into the NuMI tunnels, as transferrable tritium does not build up in the Dolomitic rock. Under these conditions, however, the consideration of ²²Na production and residual activation in the tunnel may determine shield requirements.

Acknowledgments

The authors would like to acknowledge the contributions of J. D. Cossairt and Alex Elwyn. They provided much helpful commentary and a number of the references.

porosity, and would therefore actually be higher—by a factor of about five. This would have the effect of enhancing the effect of inflow above what is shown in that paper. A separate paper [25] considers the effects of our new view of tritium production on the sump water inflow calculation that was presented in TM-2009 [2]. This paper has some considerations of the effect of fractures as well.

³⁰In the time interval since 1/15/99 EarthTech has been retained as a consultant to do such modeling for the NuMI tunnels. Their first report should be ready by the end of May, 1999.

References

- [1] K. Anderson, et. al. , *The NuMI Facility, Technical Design Report, Version 1.0*, Fermilab, October, 1998
- [2] A. Wehmann, W. Smart, S. Menary, J. Hylen, and S. Childress, *Groundwater Protection for the NuMI Project*, Fermilab TM-2009 (also NuMI-B-279), Oct. 11, 1997
- [3] T.B. Borak, M. Awschalom, W. Fairman, F. Iwami, & J. Sedlet, *The Underground Migration of Radionuclides Produced in Soil near High Energy Proton Accelerators*, Health Phys. 23, pp. 679-687, Nov, 1972
- [4] Extracted from C. Caso et. al. , *Review of Particle Physics*, The European Physical Journal C3 (1998)
- [5] C. Williamson and J.P. Boujot, *Tables of Range and Rate of Energy Loss of Charged Particles of Energy 0.5 to 150 MeV*, Report CEAN # 2189, Saclay, 1962 (CEA-R-2042)
- [6] Samuel I. Baker, Jeffrey S. Bull, and David L. Goss, *Leaching of Accelerator-Produced Radionuclides*, Health Phys. 73(6):912-918; December,1997
- [7] A. Van Ginneken, *CASIM: Program to Simulate Transport of Hadronic Cascades in Bulk Matter*, Fermilab-FN-272 January, 1975
- [8] N.V. Mokhov, *The Mars Code System User's Guide*, Fermilab-FN-628 (1995). O.E. Krivosheev and N.V. Mokhov, *A New MARS and its Applications*, Fermilab-Conf-98/43 (1998)
- [9] STS Consultants Ltd., *Hydrogeological Evaluation Report, Fermi National Accelerator Laboratory, Neutrino Main Injector (NuMI), Batavia, Illinois, 12050-DL, April, 1997*
- [10] A. Malensek, A.A. Wehmann, A. J. Elwyn, K. J. Moss, and P. M. Kesich, "Groundwater Migration of Radionuclides at Fermilab", Fermilab TM-1851 (1993)
- [11] Peter J. Gollon, *Soil Activation Calculations for the Anti-Proton Target Area*, Fermilab TM-816, September 14, 1978

- [12] A. Van Ginneken and M. Awschalom, *Hadronic Cascades, Shielding, Energy Deposition*, High Energy Particle Interactions in Large Targets, Fermi National Accelerator Laboratory, Batavia, IL., 1975
- [13] M. Awschalom, *Calculation of the Radionuclide Production in the Surroundings of the NAL Neutrino Laboratory*, Fermilab TM-292-A, March 11, 1971
- [14] A. Yu. Konobeyev and Yu. A. Korovin, *Tritium production in materials from C to Bi irradiated with nucleons of intermediate and high energies*, Nuclear Instruments and Methods in Physics Research B 82 (1993) 103-115
- [15] S. I. Baker, *Fermilab Soil Activation Experience*, Paper presented at the Fifth DOE Environmental Protection Information Meeting, Albuquerque, New Mexico, November 6-8, 1984, Published: April 1985, CONF-841187:673-683
- [16] S. I. Baker, *Soil Activation Measurements at Fermilab*, Paper presented at the Third Environmental Protection Conference, Chicago, IL, September, 1975, DOE Publication ERDA-92, CONF-750967:329-346
- [17] G. R. Stevenson and H. H. Vincke, *Initial Estimates of Radiological Parameters of Environmental Interest for the CERN/INFN Gran-Sasso Neutrino Project*, CERN/TIS-RP/IR/98-13
- [18] I. Dawson and G. R. Stevenson, *Radiological Impact of the LHC Beam-Dumps*, CERN/TIS-RP/IR/New
- [19] V. Cupps and J.D. Cossairt, *Parameters for NuMI Groundwater Protection*, draft report, September, 1998
- [20] J. Donald Cossairt, *Use of a Concentration-Based Model for Calculating the Radioactivation of Soil and Groundwater at Fermilab*, Fermilab Environmental Protection Note 8, December 1, 1994
- [21] *Fermilab ES&H Manual*, World Wide Web URL "<http://www-esh.fnal.gov/FESHM>"
- [22] J. D. Cossairt, *Effects of Inflow on NuMI Groundwater Concentrations*, January 12, 1999

- [23] Woodward-Clyde Consultants, *Summary of Radionuclide Transport Modeling for Ground Water at the Fermi National Accelerator Laboratory, Batavia, Illinois*, Project # 92C3073, August, 1993
- [24] D. Lehman et. al. , *Close-Out Report on the Department of Energy Review Committee for the Technical, Cost, Schedule, and Management Review of the Neutrinos at the Main Injector (NuMI) Project*, November 6, 1998
- [25] A. Wehmann, *Concentration Levels of Inflow in NuMI Sump Water*, NuMI-B-494, April 15, 1999
- [26] T. E. Toohig, *A Calculation of the Na²² Produced in the Soil and in Ground Water in the Vicinity of the Neutrino Laboratory at NAL*, TM-284, January, 1971
- [27] A. J. Malensek and A. J. Elwyn, *CASIM Input Parameters for Various Materials*, Fermilab-TM-1898, July, 1994
- [28] T. A. Gabriel and R. T. Santoro, *Calculation of the Long-Lived Activity in Soil Produced by 500-GeV Protons*, Nuclear Instruments and Methods 95 (1971) 275-283
- [29] T. W. Armstrong and R. G. Alsmiller, Jr., *Calculation of the Residual Photon Dose Rate Around High-Energy Proton Accelerators*, Nuclear Science and Engineering: 38, 53-62 (1969)

Appendix A Hadron Flux and Threshold Energy Dependence

A.1 Flux Calculation

We will attempt to calculate the flux of hadrons for NuMI, using the relationship between star density and hadron flux that is given by the expression

$$\phi = \lambda \times S \tag{6}$$

where ϕ is hadron flux, λ is the interaction length, and S is star density. Star density S just outside the decay pipe tunnel wall is taken as³¹

$$S = (0.7) \times (1.86 \times 10^{-11}) \times (9.4 \times 10^{12}) = 122.4 \frac{\text{stars}}{\text{cm}^3 \text{sec}}.$$

The interaction lengths for both nucleons and pions are given in the output of CASIM [7] runs that have Dolomite in the 9 available materials in the input deck. The values for Dolomite are given in the third column of Table 1. For flux, equation (6) gives

$$\phi = 34.5 \times 122.4 = 4223 \frac{\text{particles}}{\text{cm}^2 \text{sec}}. \quad (7)$$

Since CASIM uses a momentum threshold of 300 MeV/c, this flux is for hadrons with the same momentum threshold. One can easily calculate that a 300 MeV/c momentum threshold corresponds to a 48 MeV kinetic energy threshold for neutrons (and protons).

To use the activities in Table 4 of Borak et. al. we need fluxes with a 30 MeV threshold. Fig. 1 and Table 2 of Borak et. al. indicate that it is reasonable to assume³² that the neutron energy spectrum falls like $E^{-1.8}$. Using this we can estimate how the flux with a threshold of 48 MeV relates to a flux with a threshold of 30 MeV.

We have that

$$\phi_{48} = \int_{48}^{\infty} \frac{dN}{dE} dE \quad \text{equals} \quad \lambda \times S$$

$$\int_{30}^{48} \frac{dN}{dE} dE \quad \text{is what is missing}$$

$$\text{Let } \frac{dN}{dE} = E^{-1.8} \xi$$

$$\text{Then } \phi_{48} = \int_{48}^{\infty} E^{-1.8} \xi dE = \frac{E^{-0.8}}{-0.8} \Big|_{48}^{\infty} \xi = \frac{(48)^{-0.8}}{.8} \xi$$

³¹Each of these numbers is taken from TM2009 [2].

³²Reference [26] uses the same energy dependence for the neutron spectrum in soil. It makes a similar adjustment, to translate from a threshold of 20 MeV for ^{11}C production to a threshold of 30 MeV for ^{22}Na production. Section A.2 of this appendix discusses the consequence of variation in the energy dependence of this spectrum.

$$\int_{30}^{48} \frac{dN}{dE} dE = \left[\frac{(30)^{-.8}}{.8} - \frac{(48)^{-.8}}{.8} \right] \xi$$

Add together $\int_{30}^{48} \frac{dN}{dE} dE$ and $\int_{48}^{\infty} \frac{dN}{dE} dE$ and get

$$\phi_{30} = \int_{30}^{\infty} \frac{dN}{dE} dE = \frac{(30)^{-.8}}{.8} \xi$$

Noting that ξ can be expressed as

$$\xi = \left[\frac{.8}{(48)^{-.8}} \right] \phi_{48}$$

the hadron flux (ϕ_{30}) with a threshold of 30 MeV is

$$\phi_{30} = \left[\frac{(30)^{-.8}}{.8} \right] \left[\frac{.8}{(48)^{-.8}} \right] \phi_{48} \quad (8)$$

$$= 1.456 \quad (9)$$

The flux adjustment factor calculated³³ is 1.456.

³³Alex Elwyn kindly made available to us References [28] and [29], which contain graphs of neutron spectra. Using a couple of straight lines fit by eye on the spectrum of Reference [29] we did a similar calculation and obtained a flux correction factor of 1.17. Cat James has used the MARS [8] program to obtain this flux correction factor, and she determined its value to be 1.3.

Input	Units	Dolomite	Moist Soil I	Moist Soil II
Atomic Number		10.9	10.7	10.7
Atomic Weight	amu	21.8	21.6	21.6
Density	g/cm ³	2.8	2.25	2.15
Ionization Potential	eV	137.2	135.0	135.0
Radiation Length	cm	9.68	12.3	12.8
Nuclear Radius	Fermi	3.63	3.62	3.62
Elastic Cross Section	barn	0.164	0.162	0.162
Output				
interaction length for nucleons	cm	34.5	42.9	44.9
interaction length for pions	cm	42.7	53.0	55.5

Table 1: This table shows interaction lengths for nucleons and pions calculated by CASIM for three sets of input parameters—for Dolomite and two versions of "moist soil". Moist soil I is defined in TM-1898 [27] and has a density of 2.25 g/cm³. Moist soil II has a density of 2.15 g/cm³—meant to agree with the average soil density of the four samples in Borak et. al. [3]

A.2 Study of Sensitivity to Spectrum Shape

We can next explore some other choices for the energy dependence of the neutron spectrum, and we can explore the effect of introducing a physical cutoff to the spectrum at an energy E_{max} . We can write

$$\frac{dN}{dE} = E^{-1.8+\lambda} \quad (10)$$

$$\phi_\alpha = \int_\alpha^{E_{max}} \xi E^{-1.8+\lambda} dE \quad (11)$$

$$(12)$$

where α is either 30 or 48 MeV. We can continue as follows

$$\phi_\alpha = \frac{\xi}{-.8 + \lambda} [E_{max}^{-.8+\lambda} - \alpha^{-.8+\lambda}] \quad (13)$$

$$= \xi \frac{\alpha^{-.8+\lambda}}{-\lambda + .8} \left[1 - \left(\frac{E_{max}}{\alpha} \right)^{.8-\lambda} \right] \quad (14)$$

This last expression diverges for $(-\lambda + .8) \implies 0$. We will restrict ourselves to asking the effect of letting $\lambda = \pm .2$. From the expressions above we can determine

$$\phi_{30} = \phi_{48} \left(\frac{48}{30} \right)^{.8-\lambda} \frac{\left[1 - \left(\frac{48}{E_{max}} \right)^{.8-\lambda} \right]}{\left[1 - \left(\frac{30}{E_{max}} \right)^{.8-\lambda} \right]} \quad (15)$$

For the choices $E_{max} = 20,000$ MeV and $\lambda = \pm .2$ we can make a small table

E_{max}	λ	term 1	term 2
20,000	0	1.456	.99748
	-.2	1.6	.99910
	.2	1.32	.99328

In the table “term 1” is the term $\left(\frac{48}{30} \right)^{.8-\lambda}$ and “term 2” is the term that follows it in equation 15 (which includes the effect of E_{max}).

Appendix B Tritium cross section from Borak et. al.

In their Table 4 Borak et. al. give a value of $\sum n_i \sigma_{ij}$ for tritium equal to $5.9 \times 10^{-3} (\frac{cm^2}{g})$ for the A-1 sample, in the last line of the table—where activity and cross sections³⁴ are per gram of water in the soil sample. In the expression $\sum n_i \sigma_{ij}$, n_i is the number of the i th type of target nuclei per gram and σ_{ij} is the excitation function for element i and production of radioisotope j ($j=3$ for much of this paper). The number $5.9 \times 10^{-3} (\frac{cm^2}{g})$ in the last line of Table 4 in Borak et. al is normalized to the amount of water (14% by weight) in the A-1 sample. The number just above it in the Table 4 is $8.2 \times 10^{-4} (\frac{cm^2}{g})$, and is normalized to one gram of soil³⁵.

The situation is complex, since tritium is being produced from molecules in the soil and from the oxygen atom in the water molecules. The ionized tritium that is produced has a range that typically is a fraction of a centimeter. If the ionized tritium is produced from soil molecules near enough to water molecules, it can displace a hydrogen atom in a water molecule. Regarding the production of tritium as separate from the process whereby it becomes incorporated into a water molecule is a way of understanding the last two lines of Table 4 of Borak et. al.

Table 1 of Borak et. al. gives the elemental composition of soil³⁶. This information is reproduced here in Table 2. Looking at Figure 1 of Reference [14] leads us to believe that it is reasonable to assume³⁷ $\frac{\sigma_{i3}}{\sigma_{16,3}} = (\frac{A}{16})^{\frac{2}{3}}$ —for the purpose of unfolding a value for $\sigma_{16,3}$ from the data in Tables 1 and 4 of Borak et. al. The factor $(A_i/16)^{\frac{2}{3}}$ ranges from 0.83 for Carbon to 2.31 for Iron³⁸. Doing this allows us to extract the value of 23.2 millibarns for the value of $\sigma_{16,3}$ for sample A-1, using the equation

$$\sum_i n_i \sigma_{ij} = \left[\sum_i n_i \left(\frac{A_i}{16} \right)^{\frac{2}{3}} \right] \sigma_{16,3} \quad (16)$$

³⁴Note that the activity (1.6×10^{-1}) and number of radionuclide (5.9×10^{-3}) values are related by the factor $\frac{1}{.037}$; this is the conversion factor between disintegrations per second and picoCuries.

³⁵The ratio $\frac{8.2 \times 10^{-4}}{5.9 \times 10^{-3}}$ is 0.14

³⁶It doesn't indicate if this is for one particular sample or is an average over the four samples.

³⁷In Table 8 other values for this exponent are also used; the effect of changing the exponent is not strong.

³⁸Assuming $(A/16)^{\frac{2}{3}}$ scaling of cross section is equivalent to assuming that the spallation is occurring off of the nucleons at the surface of the atom

When we do this calculation for all four samples, we arrive at the values for cross

Element	A	Weight Fraction
Silicon	28	0.1447
Aluminum	27	0.0244
Iron	56	0.011
Calcium	40	0.07
Magnesium	25	0.0379
Carbon	12	0.0512
Sodium	23	0.0034
Potassium	39	0.00814
Oxygen	16	0.64

Table 2: Elemental Composition of Soil, taken from Reference [3].

section ($\sigma_{16,3}$) shown in Table 3. The variation in the values for $\sigma_{16,3}$ in Table 3 shows the effect of the varying amounts of water in each sample.

Sample	% H ₂ O (by weight)	$\sum n_i \sigma_{i,3}$ (cm ² /g)	Extracted $\sigma_{16,3}$
A-1	14	8.2×10^{-4}	23.2 mb
B-1	18.8	1.1×10^{-3}	31.2 mb
B-2	8.2	3.3×10^{-4}	9.3 mb
B-3	11.6	5.2×10^{-4}	14.7 mb
Average	13.2	6.9×10^{-4}	19.6 mb

Table 3: Values for $\sigma_{16,3}$ obtained from a calculation like that—for all four samples in Borak et. al. Also included are the water % by weight values from Table 1 of Borak et. al. and the values for $\sum n_i \sigma_{i,3}$ from their Table 4.

The average value of 19.6 mb is not an unreasonable value for $\sigma_{16,3}$, when compared with the value mentioned in the paper by D. Cossairt and V. Cupps [19]. They give there a value of $\sigma_3 = 33$ mb for the production cross section for producing ³H by means of the ¹⁶O(p,³H)X spallation reaction. When the value 19.6 mb is compared with the values in Figures 1-3, 8, & 9 in Reference [14] it could be said that it is perhaps somewhat high.

Tables 4 & 5 contain information similar to that in table 2, with the material being Dolomite and CERN Molasse (see Reference [17]). The information they contain can be used to recalculate K_3 (the probability that a ^3H nucleus will be produced at each “star”), using the formula³⁹

$$K_3 = \left[\frac{\sum_i n_i \sigma_{ij}}{\sum_i n_i \sigma_{inel}} \right] \left[\frac{f_{new_material}}{f_{soil_average}} \right]$$

where the numerator in the first factor can be re-expressed using equation 16 and we use the average value for $\sigma_{3,16} = 19.6$ from Table 3. The second factor makes an adjustment for the percentage by weight of water in the material. From Table 6 we have that $f_{soil_average} = 0.1315$. For Dolomite $f_{Dolomite} = 0.071$, from equation 3. For Molasse $f_{Molasse} = 0.10$, from Reference [18]. Using this information we arrive at the values⁴⁰

$$K_3, Dolomite = .035 \quad (17)$$

$$K_3, Molasse = .048 \quad (18)$$

Element	A	Weight Fraction	σ_{inel} (barns)
Calcium	40	0.216	0.62
Carbon	12	0.130	0.195
Oxygen	16	0.519	0.31
Magnesium	25	0.135	0.43

Table 4: Elemental Composition of Dolomite. This uses for Dolomite the molecular formula $(\text{CaCO}_3)(\text{MgCO}_3)$, where one of the Calcium atoms in Calcium Carbonate is replaced by a magnesium atom. Also included are the inelastic cross sections from Table I of Reference [13].

³⁹See Reference [11] for a similar use of this formula.

⁴⁰The value for $\sum_i n_i \sigma_{inel}$ computed from Table 4 was 1.07×10^{-2} ; for Molasse Table 5 was used and the value computed for $\sum_i n_i \sigma_{inel}$ was 1.09×10^{-2} .

Element	A	Weight Fraction	σ_{inel} (barns)
Oxygen	16	0.54	0.31
Silicon	28	0.294	0.47
Calcium	40	0.123	0.62
Carbon	12	0.037	0.195
Hydrogen	1	0.0073	0.025

Table 5: Elemental Composition of CERN Molasse. Also included are the inelastic cross sections from Table I of Reference [13].

Sample	Description	% H ₂ O (by weight)	depth (feet)	$\sum_i n_i \sigma_{i3}$ cm ² /g	K ₃ (atoms/star)
A-1	Glacial till	14	≈ 20	8.2×10^{-04}	0.075
B-1	Gray sandy clay	18.8	3-6	1.1×10^{-03}	0.100
B-2	Red sandy clay	8.2	6-12	3.3×10^{-04}	0.030
B-3	Gray clay	11.6	15-22	5.2×10^{-04}	0.047
	Average (soil)	13.2		6.9×10^{-04}	0.063
	Dolomite (eq. 17)	7.1			0.035
	Molasse (eq. 18)	10			0.048

Table 6: Compendium of K values for Tritium (in water) used in this paper. The first four are a result of computing K values for each sample from Borak et. al. [3]. The next is an average of those four values. Below that we have included the values from equations 17, 18, for comparison. For the first four rows we arrive at the value for K by dividing column 5 by 1.1×10^{-2} , which we take from Reference [11]. As noted earlier the K values are quite dependent on the amount of water contained in the samples used.

Description	K_3 (atoms/star)
Dolomite [2]	0.03
† Dolomite [1], [19]	0.0076
Molasse [17]	0.05
Limestone [6]	0.0023
Austin Chalk [6]	0.012
Taylor Marl [6]	0.027
Eagle Ford Shale [6]	0.033
Ellis County soil [6]	0.076
Fermilab soil [6]	0.044
Bentonite [6]	0.18

Table 7: Compendium of additional K values for Tritium (in water). The source of the K_3 values is the reference indicated next to the description. As noted earlier the K values are quite dependent on the amount of water contained in the samples used. The % water in the samples was not given in Reference [6] (as it was in reference [3]). [† The value of K in the second row is the value used in the NuMI TDR [1]. This value was calculated in reference [19], based upon a cross section for direct production of tritium in water & using rock porosity to adjust to a volume of rock.]

α in A^α	$K_{3,Dolomite}$	$\sigma_{3,16}$ (barns)
$\frac{2}{3}$	0.035	1.963×10^{-26}
0.8	0.034	1.922×10^{-26}
1.0	0.033	1.857×10^{-26}

Table 8: Table showing the effect on $K_{3,Dolomite}$ and $\sigma_{3,16}$ of varying the exponent α in $\left[\frac{A_7}{16}\right]^\alpha$ in equation 16.

Appendix C Independent Validation of Results

Even although the Borak et. al. [3] data was accumulated in a careful set of measurements, and the transition from data using soil to expectations for Dolomite appears not to have large uncertainties, it remains very important to obtain independent validation of the projections presented here.

One measurement parameter which may provide additional validation of the Borak et. al. results is that of the measured ratio of tritium to ^{22}Na activation in different samples. The expectation is that for a given target material ^{22}Na activation is proportional to particle flux or star density. Besides this dependence, tritium activation is also dependent on the amount of water present in the sample during beam exposure. Indicative of this is, for example, data reported by Baker [15] for soil activation measurements near the Main Ring Abort.

In soil boring measurements outside the tunnel wall adjacent to the Abort (Fig. 2 & 3 of reference [15]), the Baker data shows ^{22}Na activation which falls off in the exponential manner expected with increasing distance from the abort target source. The observed tritium distribution is very different, being relatively much reduced, compared to the ^{22}Na , in the elevation region along the tunnel, where the presence of tunnel under-drains implies greater removal of soil moisture. The ratio of activity of tritium and ^{22}Na changes by about a factor of eight, when comparing levels away from the tunnel wall and those in proximity to the tunnel wall.

Additional data plots which are also suggestive of greatly reduced tritium levels when less water is present during beam activation are seen in Fig. 3 and 4 of reference [16]. Figure 3 from reference [16] shows relative tritium and ^{22}Na activation concentrations obtained by a boring through the sand and gravel surrounding the Neutrino Area target tube. This porous material is capped by a thick clay cover. Underneath it is an impervious membrane. Just above the impervious membrane there is a drain line to remove water that collects there. Reference [16] reports that prior to making the boring into this region, water was not collected from the drain above the membrane. Hence, this sand & gravel region surrounding the target tube was relatively dry. It can be seen in Figure 3 of reference [16] that ^{22}Na levels are typically a factor of several greater than those observed for tritium.

Borings were also made near the downstream wall of a secondary target in the Neutrino Area. Results from these are plotted in Figure 4 of reference [16]. Near to the wall, in a medium of sand and gravel, we again see elevated ^{22}Na levels (relative to tritium). A second boring, in clay two meters further from the wall,

shows the opposite effect, with relatively much higher tritium levels.

The behavior of the ratio of activity of tritium and ^{22}Na in the data of references [16] and [15] corroborates the interpretation of the Borak et. al. results—i.e. that tritium activity is dependent on water being present in the medium during exposure. However, to demonstrate this conclusively and more quantitatively for NuMI it is important that new, careful accelerator exposures be done in the near future, measuring activations for Dolomite (and soil) samples containing different percentages of water.